MOTORCYCLE TIRES

Product range 2026



KEEP ON RIDING

mitas-moto.com @mitasmoto

Mitas



LEGEND

2026	New product
2026	New size
M+S	Mud + snow
OEM	OEM
GT	Gran Turismo
DOT	DOT
NHS	Not for highway service
	Discontinued
	Mousse
	Tube
	Front
	Rear
	Solo rider
	Higher loads
	Race tire / Race tire PRO
	Straight line stability
	Grip and control at extreme lean angles
	Fast and easy steering
	Lifetime / durability
	Racetrack use
	Wet conditions
	Puncture resistance
	Winter
	Bidirectional rear tire
	Tire warmer
TL*	On tube type rim fit a tube.

9 **RACING**



SPORT FORCE+RS

11 **SPORT**



SPORT FORCE+EV



SPORT FORCE+

14 **SPORT TOURING**



TOURING FORCE-SP



TOURING FORCE

16 **CUSTOM**



CUSTOM FORCE

17 **STREET**



STREET FORCE

17 **STREET**



MC-32



MC-9



MC-7

20 **CLASSIC**



H-06



H-04



H-03



H-02

48 **ENDURO**



TERRA FORCE-EX XT



TERRA FORCE-EX HT



STONE KING

62 **MOTOCROSS**



TERRA FORCE-MX SAND 2



TERRA FORCE-MX SAND



TERRA FORCE-MX SM



TERRA FORCE-MX MH

68 **PITCROSS**



TERRA FORCE-MX MH



TERRA FORCE-MX IT

69 **TRIAL**



TRIAL

70 **SPEEDWAY**



SPEEDWAY

71 **FLAT TRACK**



FLAT TRACK

26 **ADVENTURE**

TOURING FORCE-SP


TOURING FORCE

TERRA FORCE-R

ENDURO TRAIL-SP

ENDURO TRAIL-ADV 2

MC 24 INVADER



ENDURO TRAIL+

26 **ADVENTURE**



ENDURO TRAIL



MC 23 ROCKRIDER



ENDURO TRAIL-XT+

43 **RALLY**



ENDURO TRAIL-RALLY

44 **ADVENTURE CLASSIC**



E-05



E-06

48 **ENDURO**



TERRA FORCE-EF

TERRA FORCE-EF PRO

TERRA FORCE-EF 2 SM

TERRA FORCE-EX SM

TERRA FORCE-EX MH

74 **SCOOTER**

TOURING FORCE-SC 2

TOURING FORCE-SC

ENDURO TRAIL-ADV 2

MC-20 MONSUM

MC-17

MC-19

81 **WINTER**

MC-32 WIN SCOOT

82 **RACING**

MC-35 S-RACER 2.0

MC-34

MC-20 MONSUM

85 **CLASSIC**

MC-12

B-13

S-05

B-14

MC-5

89 **MOPED**

B-8

B-7

B-4

B-3

MC-11

MC-2

MC-51 MEDITERRA

94 **TUBES**

96 **MOUSSE**

104 **DISCONTINUED** (AVAILABLE UNTIL THE STOCK RUNS OUT)

Experience the journey, breathe in the freedom. Allow yourself to wander as sometimes the unexpected detours turn out to be the most captivating roads one can take.

ON-ROAD TIRE APPLICATION





SPORT FORCE+ RS



50MIN @ 80°C

- Designed for race tracks, ready to be used on public roads.
- Racing Soft compound ensures optimal grip at extreme lean angles at a service temperature of 80°C.
- Tested by Randy Krummenacher to deliver incredible lap times on Super Sports and Sport Naked motorcycles.

	COLD TIRE PRESSURE						HOT TIRE PRESSURE
bar / psi		1000cc →	→1000cc	→650cc	→400cc		
	2.5 bar / 36.3 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.3 bar / 33.4 psi	2.1 bar / 30.5 psi	1.9 - 2.2 bar/ 27.6 - 31.9 psi	2.1 - 2.4 bar / 30.5 - 34.8 psi
	2.6 bar / 37.7 psi	2.6 bar / 37.7 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.3 bar / 33.4 psi	1.3 - 1.6 bar / 18.9 - 23.2 psi	1.6 - 1.9 bar / 23.2 - 27.6 psi

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)			
							Design		Max. in service	
							Section width	Overall diameter	Overall width	Overall diameter
FRONT										
17	70000003	110/70ZR17	(54W)	TL	3.00	3.00-3.50	110	586	118	596
17	70001045	120/70ZR17	(58W)	TL	3.50	3.50-3.75	122	600	131	612
REAR										
17	70000004	140/70ZR17	66W	TL	3.75	3.75-4.50	139	628	149	642
17	70000005	150/60ZR17	(66W)	TL	4.25	4.00-4.50	151	612	162	624
17	70001046	180/55ZR17	(73W)	TL	5.50	5.50-6.00	178	630	190	644
17	70001296	180/60ZR17	(75W)	TL	5.00	5.00-5.50	180	648	193	664
17	70001047	190/55ZR17	(75W)	TL	6.00	5.50-6.00	190	642	203	656
17	70001297	200/55ZR17	(78W)	TL	6.25	6.00-6.50	200	652	214	668



SPORT FORCE+ EV

50MIN @ 80°C



- Designed for public roads, ready to be used on the race track.
- Multi compound technology (MCTT) for improved traction at high service temperatures and optimal grip at extreme lean angles.
- Recommended for Super Sports, Sports Naked and Sport Touring motorcycles.

	COLD TIRE PRESSURE						HOT TIRE PRESSURE
bar / psi		1000cc →	→ 1000cc	→ 650cc	→ 400cc		
	2.5 bar / 36.3 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.3 bar / 33.4 psi	2.1 bar / 30.5 psi	2.0 - 2.3 bar/ 29 - 33.4 psi	2.2 - 2.5 bar / 31.9 - 36.3 psi
	2.6 bar / 37.7 psi	2.6 bar / 37.7 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.3 bar / 33.4 psi	1.7 - 2.0 bar / 24.7 - 29 psi	2.0 - 2.3 bar / 29 - 33.4 psi

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)			
							Design		Max. in service	
							Section width	Overall diameter	Overall width	Overall diameter
FRONT										
17	70000078	120/70ZR17	(58W)	TL	3.50	3.50-3.75	122	600	131	612
REAR										
17	70000079	160/60ZR17	(69W)	TL	4.50	4.25-5.00	161	624	172	638
17	70000080	180/55ZR17	(73W)	TL	5.50	5.50-6.00	178	630	190	644
17	70001056	180/60ZR17	(75W)	TL	5.00	5.00-5.50	180	648	193	664
17	70000081	190/50ZR17	(73W)	TL	6.00	5.50-6.00	190	622	203	636
17	70000082	190/55ZR17	(75W)	TL	6.00	5.50-6.00	190	642	203	656
17	70001057	200/55ZR17	(78W)	TL	6.25	6.00-6.50	200	652	214	668

SPORT FORCE+



- Designed to be a safe and predictable choice for every day riding on paved roads.
- Special compound designed to reach optimal service temperature extremely fast.
- Recommended for Super Sports, Sports Naked and Street Naked motorcycles.
- OE fitment: APRILIA RS 125, BETA RR MOTARD 125cc, BETA RR MOTARD 50cc, RIEJU MRT SM, TM SMR 450, TM SMR 300, TM SMR 125, VENT DERAPAGE 125cc, VENT DERAPAGE 50cc

COLD TIRE PRESSURE								
	RADIAL TIRES					DIAGONAL TIRES		
bar / psi		1000cc →	→ 1000cc	→ 650cc	→ 400cc		→ 200cc	→ 400cc
	2.6 bar / 37.7 psi	2.6 bar / 37.7 psi	2.5 bar / 36.3 psi	2.3 bar / 33.4 psi	2.2 bar / 31.9 psi	2.2 bar / 31.9 psi	2.0 bar / 29 psi	2.2 bar / 31.9 psi
	2.9 bar / 42.1 psi	2.9 bar / 42.1 psi	2.7 bar / 39.2 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.5 bar / 36.3 psi	2.2 bar / 31.9 psi	2.4 bar / 34.8 psi



SPORT FORCE+

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
17	70001251	100/80-17	52S	TL/TT	2.50	2.15-2.75	101	592	111	604	70001340	
17	70001229	100/80-17	52H	TL/TT	2.50	2.15-2.75	101	592	111	604	70001340	
17	70001231	110/70-17	54H	TL/TT	3.00	3.00-3.50	110	586	118	596		
17	70001477	110/70R17	54H	TL	3.00	3.00-3.50	110	586	118	596		
17	70000068	110/70ZR17	(54W)	TL	3.00	3.00-3.50	110	586	118	596		
17	70000069	120/60ZR17	(55W)	TL	3.50	3.50-3.75	122	576	131	586		
17	70000070	120/65ZR17	(56W)	TL	3.50	3.50-3.75	122	588	131	598		
17	70000071	120/70ZR17	(58W)	TL	3.50	3.50-3.75	122	600	131	612		
REAR												
17	70001250	130/70-17	62S	TL/TT	3.50	3.00-4.00	129	614	142	626	70001338	
17	70001233	130/70-17	62H	TL/TT	3.50	3.00-4.00	129	614	142	626	70001338	
17	70001234	140/70-17	66H	TL/TT	3.75	3.75-4.50	139	628	149	642	70001338	
17	70000072	140/70ZR17	66W	TL	3.75	3.75-4.50	139	628	149	642		
17	70001254	150/60-17	66H	TL/TT	4.25	4.00-4.50	151	612	162	624	70001338	
17	70001479	150/60R17	66H	TL	4.25	4.00-4.50	151	612	162	624		
17	70000073	150/60ZR17	(66W)	TL	4.25	4.00-4.50	151	612	162	624		
17	70000074	160/60ZR17	(69W)	TL	4.50	4.25-5.00	161	624	172	638		
17	70000075	180/55ZR17	(73W)	TL	5.50	5.50-6.00	178	630	190	644		
17	70000076	190/50ZR17	(73W)	TL	6.00	5.50-6.00	190	622	203	636		
17	70000077	190/55ZR17	(75W)	TL	6.00	5.50-6.00	190	642	203	656		
FRONT / REAR												
17	70001679	110/80-17	57H	TL/TT	2.50	2.15-3.00	109	608	120	620		2026
17	70001682	120/70-17	58H	TL/TT	3.50	2.75-3.75	122	600	134	612		2026



TOURING FORCE-SP



- Engineered for superior performance and safety on all paved road surfaces.
- Utilizing Multi Compound Technology (MCTT) for extended service life and high silica content for superior grip on both dry and wet road surfaces, enhancing durability and safety.
- Recommended for lighter Super Sports, Sports Naked and Sports Touring motorcycles. Available for Maxi scooters.

COLD TIRE PRESSURE

bar / psi		1000cc →	→ 1000cc	→ 650cc	→ 400cc
	2.5 bar / 36.3 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi	2.3 bar / 33.4 psi	2.2 bar / 31.9 psi
	2.9 bar / 42.1 psi	2.7 bar / 39.2 psi	2.5 bar / 36.3 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT											
15	70001406	120/70R15	56V	TL	3.50	3.50-3.75	122	549	131	561	2026
17	70001385	120/60ZR17	(55W)	TL	3.50	3.50-3.75	122	576	131	586	
17	70001386	120/70ZR17	(58W)	TL	3.50	3.50-3.75	122	600	131	612	
REAR											
15	70001405	160/60R15	67V	TL	4.50	4.25-5.00	161	573	172	587	2026
17	70001387	160/60ZR17	(69W)	TL	4.50	4.25-5.00	161	624	172	638	
17	70001388	180/55ZR17	(73W)	TL	5.50	5.50-6.00	178	630	190	644	
17	70001389	190/50ZR17	(73W)	TL	6.00	5.50-6.00	190	622	203	636	
17	70001390	190/55ZR17	(75W)	TL	6.00	5.50-6.00	190	642	203	656	

TOURING FORCE



- Designed for all-round performance and safety on all types of paved roads.
- Multi compound technology (MCTT) for a longer service life and high silica content for optimal grip in both dry and wet road conditions.
- Recommended for Super Sports, Sports Naked, Sports Touring, Maxi Scooters and Dual-Purpose Adventure Touring motorcycles.

COLD TIRE PRESSURE

bar / psi		1000cc →	→ 1000cc	→ 650cc	→ 400cc
	2.6 bar / 37.7 psi	2.6 bar / 37.7 psi	2.5 bar / 36.3 psi	2.3 bar / 33.4 psi	2.2 bar / 31.9 psi
	3.0 bar / 43.5 psi	2.8 bar / 40.6 psi	2.7 bar / 39.2 psi	2.5 bar / 36.3 psi	2.4 bar / 34.8 psi

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)			
							Design		Max. in service	
							Section width	Overall diameter	Overall width	Overall diameter
FRONT										
15	70001097	120/70R15	56V	TL	3.50	3.50-3.75	122	549	131	561
17	70000087	120/60ZR17	(55W)	TL	3.50	3.50-3.75	122	576	131	586
17	70000088	120/70ZR17	(58W)	TL	3.50	3.50-3.75	122	600	131	612
REAR										
15	70001099	160/60R15	67V	TL	4.50	4.25-5.00	161	573	172	587
17	70000089	160/60ZR17	(69W)	TL	4.50	4.25-5.00	161	624	172	638
17	70000090	180/55ZR17	(73W)	TL	5.50	5.50-6.00	178	630	190	644
17	70000091	190/50ZR17	(73W)	TL	6.00	5.50-6.00	190	622	203	636
17	70000092	190/55ZR17	(75W)	TL	6.00	5.50-6.00	190	642	203	656

CUSTOM FORCE



- Designed to be safe and predictable, for every day cruising with a unique thread pattern.
- Special compound designed for longer service life and optimal grip in both dry and wet road conditions.
- Recommended for Classic Cruiser and Power Cruiser motorcycles.

COLD TIRE PRESSURE				
bar / psi		1100cc →	→ 1100cc	→ 650cc
	2.6 bar / 38 psi	2.6 bar / 38 psi	2.4 bar / 35 psi	2.3 bar / 33 psi
	2.9 bar / 42 psi	2.9 bar / 42 psi	2.7 bar / 39 psi	2.6 bar / 38 psi

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1	Tube option 2
FRONT												
16	70000031	130/90-16 (MT90-16)	67H	TL*	3.00	2.50-3.50	129	640	142	656	70001332	
19	70000030	100/90-19	57H	TL*	2.50	2.15-2.75	101	663	111	675	70001351	70001352
21	70000036	80/90-21 (MH90-21)	54H	TL*	1.85	1.60-2.15	80	677	88	687	70001356	70001355
REAR												
15	70000035	170/80B15	77H	TL*	4.00	3.00-4.50	170	653	187	673	70001360	
16	70000034	150/80B16 (MV85 B16)	77H	TL*	3.50	3.00-4.25	150	646	165	662		
REINFORCED												
FRONT												
16	70000032	130/90B16 (MT90 B16)	73H	TL*	3.00	2.50-3.50	129	640	142	656	70001332	
REAR												
16	70000033	130/90B16 (MT90 B16)	73H	TL*	3.00	2.50-3.50	129	640	142	656	70001332	

STREET FORCE



- Designed for safe and predictable everyday riding on paved roads, regardless of weather conditions.
- The special compound quickly reaches its optimal service temperature, ensuring reliable performance.
- Ideal for small capacity SuperMoto and Sports/Touring motorcycles.
- OE fitment: MOTO GUZZI V7 850 STONE

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1	Tube option 2	
FRONT													
17	70001252	100/80-17	52S	TL/TT	2.50	2.15-2.75	101	592	111	604	70001336	70001335	
18	70001571	100/90-18	56H	TL/TT	2.50	2.15-2.75	101	637	111	649	70001347	70001346	
REAR													
17	70001253	130/70-17	62S	TL/TT	3.50	3.00-4.00	129	614	142	626	70001337		
17	70001490	130/80-17	65H	TL/TT	3.00	2.50-3.50	129	640	142	654	70001337		
17	70001397	150/70B17	69H	TL/TT	4.25	3.50-4.50	151	642	166	656	70001338		
REINFORCED													
FRONT/REAR													
17	70001118	2.25-17 (2 1/4-17)	39P	TL/TT	1.5	1.20-1.60	62	558	66	566	70001339		2026
17	70001120	2.50-17	43P	TL/TT	1.6	1.20-1.85	68	574	72	596	70001340		2026
17	70001124	2.75-17 (2 3/4-17)	47P	TL/TT	1.85	1.35-1.85	75	584	80	594	70001340		2026

MC-32



- Designed with a M+S (Mud & Snow) pattern to be safe and predictable even in off-road conditions.
- Special durable compound designed to perform in ON and OFF road conditions.
- Sizes available for Standard motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
17	70000085	100/80-17	52R	TL*	2.50	2.15-2.75	101	592	111	604	70001336	70001335
REAR												
17	70000086	130/70-17	62R	TL*	3.50	3.00-4.00	129	614	142	626	70001337	

MC-9



- Designed to be a safe and predictable choice for every day riding on paved roads.
- Special durable compound designed to perform in all urban conditions.
- Recommended for Classic motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
REAR												
16	70000006	90/90-16	48P	TL*	2.15	1.85-2.50	90	568	99	580	70001327	70001331

MC-7



- Designed to be a safe and predictable choice for cruising and commuting.
- Special compound designed for longer service life and optimal grip in both dry and wet road conditions.
- Recommended for small capacity Custom and Sport Classic motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
16	70000067	110/90-16	59P	TL/TT	2.50	2.15-3.00	109	604	120	616	70001332	
REAR												
15	70000060	130/90-15	66R	TL/TT	3.00	2.50-3.50	129	615	142	631		
15	70000061	140/90-15	70R	TL/TT	3.50	2.75-3.75	142	633	156	651		
FRONT/REAR												
16	70000059	120/90-16	63P	TL*	2.75	2.50-3.00	119	622	131	638		
18	70000062	2.75-18	42P	TL/TT	1.85	1.40-1.85	75	613	86	625	70001347	
18	70000066	90/90-18	51R	TL/TT	2.15	1.85-2.50	90	619	99	631	70001346	70001347

REINFORCED

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
18	70001255	3.00-18	52S	TL/TT	1.85	1.60-2.15	80	627	86	639	70001347	

H-06



- Designed to be a safe and dynamic choice for a comfortable ride on paved roads.
- Versatile tread pattern designed to provide optimal grip and offers longer service life.
- Recommended for Classic motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
16	70000910	2.75-16 (2 3/4-16)	46P	TT	1.85	1.40-1.85	75	562	81	574	70001328	
16	70000914	3.25-16 (3 1/4-16)	55P	TT	2.15	1.85-2.50	89	588	96	600	70001327	70001332
18	70000915	3.25-18 (90/100-18)	59P	TT	2.15	1.85-2.50	89	639	96	651	70001347	70001346
18	70000918	3.50-18	62P	TT	2.15	2.15-2.50	93	649	100	663	70001346	
18	70000919	4.00-18	64S	TT	2.50	2.15-3.00	108	671	117	685	70001349	70001345
19	70000912	2.75-19 (80/100-19)	43P	TT	1.85	1.40-1.85	75	639	81	651	70001353	
19	70000913	3.00-19	49P	TT	1.85	1.60-2.15	80	653	86	665	70001351	
19	70000916	3.25-19 (90/110-19)	54P	TT	2.15	1.85-2.50	89	665	96	677	70001351	
REINFORCED												
FRONT/REAR												
16	70000917	3.50-16	58P	TT	2.15	2.15-2.50	93	598	100	612	70001327	
18	70000911	2.75-18 (80/100-18)	48P	TT	1.85	1.40-1.85	75	613	81	625	70001347	



H-04



- Designed to be a safe and predictable choice for every day riding on paved roads.
- Special compound designed to offer stability and the best grip.
- Recommended for Classic motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
16	70000908	2.50-16 (70/100-16)	41P	TT	1.50	1.35-1.60	64	542	70	554	70001328	70001329
18	70000909	3.25-18	59P	TT	2.15	1.85-2.50	89	639	96	651	70001347	70001346

H-03



- Designed to be a safe and reliable choice for daily riding on paved roads.
- Special compound designed to provide stability and optimal grip.
- Recommended for Classic motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
18	70000905	3.00-18	52P	TT	1.85	1.60-2.15	80	627	86	639	70001347	
18	70000906	3.25-18 (90/100-18)	59P	TT	2.15	1.85-2.50	89	639	96	651	70001347	70001346
18	70000907	3.50-18	62P	TT	2.15	2.15-2.50	93	649	100	663	70001346	
REINFORCED												
FRONT/REAR												
18	70000904	2.75-18	48P	TT	1.85	1.40-1.85	75	613	81	625	70001347	
18	70001439	3.00-18	52S	TT	1.85	1.60-2.15	80	627	86	639	70001347	

H-02



- Designed to be a safe and reliable choice for daily riding on paved roads.
- Versatile tread pattern deisgned to provide great grip in wet and dry weather conditions.
- Recommended for Classic motorcycles and available in SUPER SIDE version for sidecars.
- OE fitment: MAEVING RM2

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
19	70001862	2.00-19 (2-19)	31S	TT	1.35	1.20-1.35	55	595	58	603	70001340	2026
19	70001863	2.25-19 (2 1/4-19)	37S	TT	1.50	1.20-1.60	62	609	66	617	70001354	2026
19	70000899	2.50-19	41P	TT	1.50	1.35-1.60	64	619	70	631	70001353	
19	70000900	3.00-19	57P	TT	1.85	2.15-2.50	80	653	86	665	70001351	
19	70000901	3.50-19	63P	TT	2.15	2.15-2.50	93	675	100	689	70001351	
19	70000903	4.00-19	71P	TT	2.50	2.15-3.00	108	697	117	711	70001351	


SUPER SIDE

FRONT/REAR											
19	70000902	4.00-19	71P	TT	2.50	2.15-3.00	108	697	117	711	70001351



A rush of adrenaline, the heart beats faster, enchanting trails and endless adventures. Fuel your soul and grant yourself the chance to venture the world.

ADVENTURE TIRE APPLICATION

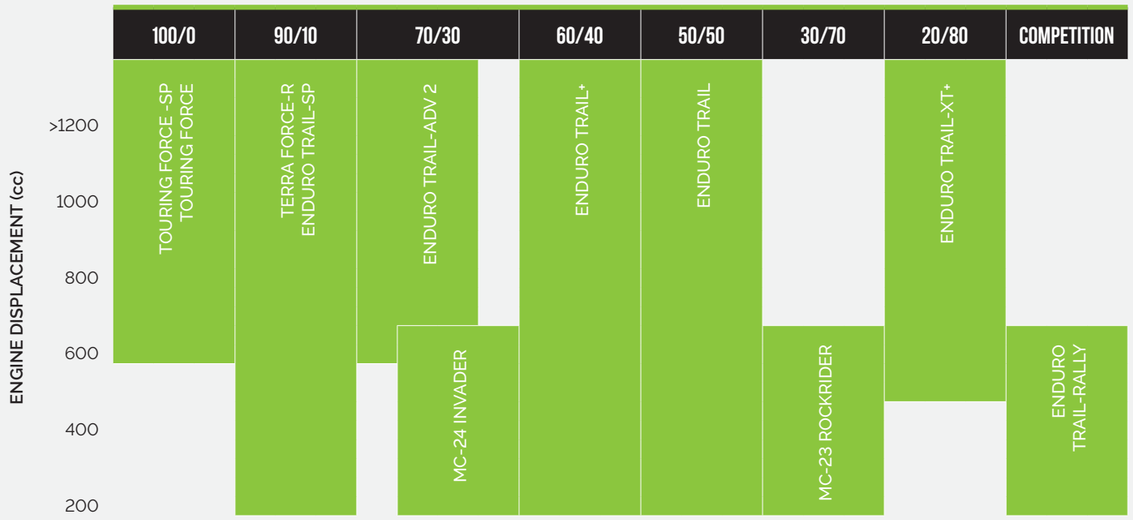



DAKAR

Tire with a stronger carcass and higher puncture resistance. Suitable for higher loads, longer adventure trips and extreme conditions.



TOURING FORCE-SP 2026

ON 100 OFF



- Designed for all-round performance and safety on all types of paved roads.
- Multi compound technology (MCTT) for a longer service life and high silica content for optimal grip in both dry and wet road conditions.
- Recommended for Super Sports, Sports Naked, Sports Touring, Maxi Scooters and Dual-Purpose Adventure Touring motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)			
							Design		Max. in service	
							Section width	Overall diameter	Overall width	Overall diameter
FRONT										
19	70001625	120/70ZR19	(60W)	TL	3.50	3.00-3.75	122	651	131	663
REAR										
17	70001626	170/60ZR17	(72W)	TL	4.50	4.50-5.50	168	636	180	650



ADVENTURE

TOURING FORCE

ON 100 OFF



- Designed for all-round performance and safety on all types of paved roads.
- Multi compound technology (MCTT) for a longer service life and high silica content for optimal grip in both dry and wet road conditions.
- Recommended for Super Sports, Sports Naked, Sports Touring, Maxi Scooters and Dual-Purpose Adventure Touring motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)			
							Design		Max. in service	
							Section width	Overall diameter	Overall width	Overall diameter
FRONT										
19	70000531	110/80ZR19	(59W)	TL	2.50	2.50-3.00	109	659	117	671
19	70000533	120/70ZR19	(60W)	TL	3.50	3.00-3.75	122	651	131	663
REAR										
17	70000534	150/70ZR17	(69W)	TL	4.25	4.00-4.50	151	642	162	656
17	70000535	170/60ZR17	(72W)	TL	4.50	4.50-5.50	168	636	180	650



TERRA FORCE-R

ON 90 10 OFF





- Classified for 90% on-road use and designed for all-round performance and confidence on paved and gravel roads.
- Multi compound technology (MCTT) combined with functional tread pattern offer excellent traction on wet and dry roads.
- Recommended for Dual-Purpose Adventure Touring motorcycles.
- 100/90-19 and 130/80-17 sizes have been rebranded to ENDURO TRAIL-SP

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70000523	110/80R19	59V	TL*	2.50	2.50-3.00	109	659	117	671		
19	70000524	120/70ZR19	60W	TL	3.50	3.00-3.75	122	651	131	663		
21	70000529	90/90-21 (3.00-21)	54H	TL/TT	2.15	1.85-2.50	90	695	99	707	70001356	70001355
21	70000530	90/90-21 (3.00-21)	54V	TL/TT	2.15	1.85-2.50	90	695	99	707	70001356	70001355
REAR												
17	70000521	120/90-17	64H	TL*	2.75	2.50-3.00	119	648	131	664	70001337	
17	70000525	140/80R17	69V	TL*	3.50	3.50-3.75	142	656	152	672		
17	70000526	150/70R17	69V	TL*	4.25	4.00-4.50	151	642	162	656		
17	70000528	170/60ZR17	72W	TL	4.50	4.50-5.50	168	636	180	650		
18	70000527	150/70R18	70V	TL/TT	4.25	4.00-4.50	151	667	162	681	70001345	

ENDURO TRAIL-SP

ON 90 10 OFF





- 90% on-road use for all-round performance and confidence on both paved and gravel roads.
- Multi Compound Technology (MCTT) combined with a functional tread pattern, offers excellent traction on wet and dry surfaces.
- Recommended for Dual-Purpose Adventure Touring motorcycles.
- ENDURO TRAIL-SP is a rebranding of the TERRA FORCE-R pattern that will gradually be rolled out to all sizes.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70001293	100/90-19	57H	TL/TT	2.50	2.15-2.75	101	663	111	675	70001351	70001352
19	70001381	100/90-19	57V	TL/TT	2.50	2.15-2.75	101	663	111	675	70001351	70001352
REAR												
17	70001294	130/80B17	65H	TL/TT	3.00	2.50-3.50	129	640	142	654	70001337	



ENDURO TRAIL - ADV 2

ON 70 30 OFF



- Classified for 70% on-road use and designed for all-round performance and confidence on paved roads as well as off-road.
- Multi compound tread technology with a chevron pattern ensures ultimate grip and durability in ON/OFF.
- Recommended for Dual-Purpose Adventure Touring motorcycles.
- OE fitment: APRILIA SR GT 400

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT											
19	70001414	110/80R19	59V	TL/TT	2.50	2.50-3.00	109	659	117	671	70001351
19	70001413	120/70ZR19	60W	TL/TT	3.50	3.00-3.75	122	651	131	663	70001350
21	70001415	90/90-21 (3.00-21)	54V	TL/TT	2.15	1.85-2.50	90	695	99	707	70001356
REAR											
17	70001412	150/70R17	69V	TL/TT	4.25	4.00-4.50	151	642	162	656	70001337
17	70001410	170/60ZR17	72W	TL/TT	4.50	4.50-5.50	168	636	180	650	70001337
18	70001411	150/70R18	70V	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345

MC-24 INVADER

ON 70 30 OFF



- Classified for 70% on-road use and designed for all-round performance and confidence on paved roads as well as off-road.
- Heavy-Duty compound combined with a deep crossed pattern ensure traction and predictable performance in ON/OFF.
- Recommended for Dual-Purpose Adventure Touring motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70000538	100/90-19	57S	TL*	2.50	2.15-2.75	101	663	111	675	70001351	70001352
21	70000542	90/90-21 (3.00-21)	54S	TT	2.15	1.85-2.50	90	695	99	707	70001356	70001355
REAR												
17	70000540	120/90-17	64S	TL*	2.75	2.50-3.00	119	648	131	664	70001337	
17	70000541	130/80-17	65S	TL*	3.00	2.50-3.50	129	640	142	654	70001337	
18	70000539	120/80-18	62S	TT	2.75	2.50-3.00	119	649	131	633	70001346	70001345



ENDURO TRAIL+

ON 60 40 OFF

M+S OEM



- Classified M+S for 60% on-road use and designed for all-round performance and confidence on paved roads and gravel roads.
- Agressive big block chevron tread pattern gives it excellent grip, stability and cornering stability even in wet conditions. Available in a Heavy-Duty version or optional Ultra Heavy-Duty version (DAKAR) designed for extended durability.
- Recommended for all Dual-Purpose Adventure Touring motorcycles.
- OE fitment: KTM 125 ENDURO R MY26, KTM 390 ADVENTURE R MY26, KTM 790 ADVENTURE R MY26, KTM 890 ADVENTURE R MY26, FANATIC CABALLERO 125cc

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70001499	100/90-19	57H	TL/TT	2.5	2.15-2.75	101	663	111	685	70001351	70001352
19	70001033	110/80B19	59H	TL/TT	2.50	2.15-3.00	109	659	120	681	70001351	
19	70001035	120/70B19	60H	TL/TT	3.50	2.75-3.75	122	651	134	671	70001352	
21	70000537	90/90-21 (3.00-21)	54T	TL/TT	2.15	1.85-2.50	90	695	99	715	70001356	70001355
21	70001500	90/90-21 (3.00-21)	54H	TL/TT	2,15	1.85-2.50	90	695	99	715	70001356	70001355
REAR												
17	70001208	120/90B17	64H	TL/TT	2.75	2.50-3.00	119	648	131	648	70001337	
17	70001037	130/80B17	65H	TL/TT	3.00	2.50-3.50	129	640	142	664	70001337	
17	70001038	140/80B17	69H	TL/TT	3.50	2.75-3.75	142	656	156	682	70001337	
17	70001042	150/70B17	69H	TL/TT	4.25	3.50-4.50	151	642	166	668	70001337	
17	70001044	170/60B17	72H	TL/TT	4.50	4.00-5.50	168	636	185	660		
18	70001040	140/80B18 (5.10-18)	70H	TL/TT	3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70000536	150/70B18	70T	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345	
18	70001185	150/70B18	70H	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345	
18	70001418	150/70R18	70T	TL/TT	4.25	3.50-4.50	151	667	166	667	70001345	
FRONT/REAR												
18	70001036	120/80B18	62H	TL/TT	2.75	2.50-3.00	119	649	131	673	70001346	70001345

ENDURO TRAIL+ DAKAR

ON 60 40 OFF

M+S



DAKAR

Tire with a stronger carcass and higher puncture resistance. Suitable for higher loads, longer adventure trips and extreme conditions.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
FRONT													
19	70001032	110/80B19	59H	TL/TT		2.50	2.15-3.00	109	659	120	681	70001351	
19	70001034	120/70B19	60H	TL/TT		3.50	2.75-3.75	122	651	134	671	70001352	
21	70001187	90/90B21 (3.00B21)	54H	TL/TT		2.15	1.85-2.50	90	695	99	715	70001356	70001355
REAR													
17	70001041	150/70B17	69H	TL/TT		4.25	3.50-4.50	151	642	166	668	70001337	
17	70001043	170/60B17	72H	TL/TT		4.50	4.00-5.50	168	636	185	660		
18	70001039	140/80B18 (5.10-18)	70H	TL/TT		3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70001188	150/70B18	70H	TL/TT		4.25	3.50-4.50	151	667	166	693	70001345	

ENDURO TRAIL

ON 50 50 OFF

M+S OEM



- Classified M+S for 50% on-road use and designed for all-round performance and confidence on paved roads and gravel roads.
- Agressive small block chevron tread pattern gives it excellent grip, stability and cornering stability even in wet conditions. Available in a Heavy-Duty version or optional Ultra Heavy-Duty version (DAKAR) designed for extended durability.
- Recommended for Dual-Purpose Adventure Touring motorcycles.
- OE fitment: FANTIC CABALLERO 125cc

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70001002	110/80-19	59H	TL/TT	2.50	2.15-3.00	109	659	120	681	70001351	
21	70001015	90/90-21 (3.00-21)	54H	TL/TT	2.15	1.85-2.50	90	695	99	715	70001356	70001355
REAR												
17	70001003	120/90B17	64H	TL/TT	2.75	2.50-3.00	119	648	131	674	70001337	
17	70001004	130/80B17	65H	TL/TT	3.00	2.50-3.50	129	640	142	664	70001337	
17	70001006	140/80B17	69H	TL/TT	3.50	2.75-3.75	142	656	156	682	70001337	
17	70001011	150/70B17	69H	TL/TT	4.25	3.50-4.50	151	642	166	668	70001337	
18	70001005	130/80B18	72H	TL/TT	3.00	2.50-3.50	129	665	142	689	70001343	70001344
18	70001008	140/80B18 (5.10-18)	70H	TL/TT	3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70001013	150/70B18	70H	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345	

ENDURO TRAIL DAKAR

ON 50 50 OFF

M+S



DAKAR

Tire with a stronger carcass and higher puncture resistance. Suitable for higher loads, longer adventure trips and extreme conditions.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
FRONT													
19	70001001	110/80B19	59H	TL/TT		2.50	2.15-3.00	109	659	120	681	70001351	
21	70001014	90/90B21 (3.00B21)	54H	TL/TT		2.15	1.85-2.50	90	695	99	715	70001356	70001355
REAR													
17	70001010	150/70B17	69H	TL/TT		4.25	3.50-4.50	151	642	166	668	70001337	
18	70001007	140/80B18 (5.10-18)	70H	TL/TT		3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70001012	150/70B18	70H	TL/TT		4.25	3.50-4.50	151	667	166	693	70001345	



CHRIS BIRCH

MC-23

ON 40 60 OFF

M+S

OEM



- Classified M+S only for 40% on-road use and designed for all-round performance and confidence on gravel as well as on paved roads.
- Agressive big block tread pattern with a Heavy-Duty compound gives it excellent grip, stability and cornering stability even in wet conditions.
- Recommended for Dual-Purpose Adventure Touring motorcycles and small cubic capacity Enduro motorcycles.
- OE fitment: BETA ENDURO 50cc, SHERCO ENDRUO 50cc, RIEJU MRT ENDURO, VENT BAJA 50cc

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
ROCKRIDER												
FRONT												
21	70000471	90/90-21 (3.00-21)	54R	TT	2.15	1.85-2.50	90	695	99	707	70001356	70001355
REAR												
18	70000469	120/90-18	65R	TT	2.75	2.50-3.00	119	673	131	689	70001343	70001344
18	70000470	140/80-18	70R	TT	3.50	2.75-3.75	142	681	156	697	70001345	70001344
ROCKYRIDER												
FRONT												
21	70000473	80/90-21	48P	TT	1.85	1.60-2.15	80	677	88	695	70001356	70001355
REAR												
18	70000472	110/80-18	58P	TT	2.50	2.15-3.00	109	633	120	653	70001346	70001343

ENDURO TRAIL - XT+

ON 20 80 OFF





- Classified M+S only for 20% on-road use and designed for all-round performance and confidence on all types of gravel terrains and especially on difficult off-road trails.
- Extremely agressive longitudinal scoop shaped block tread pattern ensure grip on soft, muddy terrains as well as hard, rocky terrains with limited compromise of paved road performance. Available in a Heavy-Duty version or optional Ultra Heavy-Duty version (DAKAR) designed for extended durability.
- Recommended for Dual-Purpose Adventure Touring motorcycles in Rally configurations.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
19	70001141	100/90-19	57T	TL/TT	2.50	2.15-2.75	101	663	111	685	70001351	70001352
19	70001177	110/80-19	59T	TL/TT	2.50	2.15-3.00	109	659	120	681	70001351	
19	70001179	120/70B19	60T	TL/TT	3.50	2.75-3.75	122	651	134	671	70001352	
21	70001150	80/90-21	48H	TL/TT	1.85	1.60-2.15	80	677	88	695	70001356	70001355
21	70001031	90/90-21 (3.00-21)	54T	TL/TT	2.15	1.85-2.50	90	695	99	715	70001356	70001355
21	70001184	90/100-21	57H	TL/TT	2.15	1.85-2.50	90	713	99	735	70001356	70001355
REAR												
17	70001257	130/80B17	65S	TL/TT	3.00	2.50-3.50	129	640	142	664	70001337	
17	70001181	170/60B17	72T	TL/TT	4.50	4.00-5.50	168	636	185	650		
18	70001019	110/80-18	58T	TL/TT	2.50	2.15-3.00	109	659	120	655	70001346	70001343
18	70001149	120/90B18	65T	TL/TT	2.75	2.50-3.00	119	673	131	689	70001343	70001344
18	70001026	140/80B18	70T	TL/TT	3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70001029	150/70B18	70T	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345	
18	70001431	150/70R18	70T	TL/TT	4.25	3.50-4.50	151	667	166	693	70001345	

ENDURO TRAIL - XT+ DAKAR

ON 20 80 OFF





DAKAR

Tire with a stronger carcass and higher puncture resistance. Suitable for higher loads, longer adventure trips and extreme conditions.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
FRONT													
19	70001020	110/80B19	59T	TL/TT		2.50	2.15-3.00	109	659	120	681	70001351	
19	70001178	120/70B19	60T	TL/TT		3.50	2.75-3.75	122	625	134	637	70001352	
21	70001030	90/90B21 (3.00B21)	54T	TL/TT		2.15	1.85-2.50	90	695	99	715	70001356	70001355
21	70001183	90/100B21	57H	TL/TT		2.15	1.85-2.50	90	713	99	735	70001356	70001355
REAR													
17	70001021	120/90B17	64T	TL/TT		3.50	2.50-3.00	119	648	131	674	70001337	
17	70001022	130/80B17	65R	TL/TT		3.00	2.50-3.50	129	640	142	664	70001337	
17	70001024	140/80B17	69T	TL/TT		3.50	2.75-3.75	142	656	156	682	70001337	
17	70001027	150/70B17	69T	TL/TT		4.25	3.50-4.50	151	642	166	668	70001337	
17	70001180	170/60B17	72T	TL/TT		4.50	4.00-5.50	168	636	185	650		
18	70001023	130/80B18 (5.10-18)	72R	TL/TT		3.00	2.50-3.50	129	665	142	689	70001343	70001344
18	70001025	140/80B18	70T	TL/TT		3.50	2.75-3.75	142	681	156	707	70001345	70001344
18	70001028	150/70B18	70T	TL/TT		4.25	3.50-4.50	151	667	166	693	70001345	



BENJAMIN MELOT
winner of Original By Motul at Dakar 2026

ENDURO TRAIL - RALLY

DOT M+S



- Designed for high-speed Rally Raid competitions for all terrain types with class leading performance, stability and resistance to damage.
- High performance compound with an aggressive rear block tread pattern and reinforced carcass ensures the ultimate grip and durability at all temperatures and at all speeds. Three different front patterns options ensure maximum control on any terrain type.
- Recommended for Rally Adventure and Dual-Sports motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Tube option 1	Tube option 2
								Design		Max. in service				
								Section width	Overall diameter	Overall width	Overall diameter			
SM														
FRONT														
21	70000995	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000898	70001356	70001355
MH														
FRONT														
21	70000920	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000898	70001356	70001355
21	70000982	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000893	70001356	70001355
PRO														
FRONT														
21	70000994	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000898	70001356	70001355
REAR														
18	70000993	140/80B18	70R	TT		3.50	2.75-3.75	142	681	156	707	70000897	70001345	70001344
18	70001527	150/70-18	70R	TL/TT		4.25	3.50-4.50	151	667	187	693		70001345	

E-05



- Classified M+S for ON/OFF road use and all terrain types.
- Classic Trail tread pattern ensures great durability, grip and performance.
- Recommended for Classic Trail motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
21	70001143	2.75-21	45S	TT	1.85	1.40-1.85	75	689	86	707	70001356	70001355
21	70001371	3.00-21	54S	TT	1.85	1.60-2.15	80	703	92	723	70001356	70001355
FRONT/REAR												
19	70001146	3.25-19	54S	TT	2.15	1.85-2.50	89	665	102	687	70001351	
19	70001147	3.50-19	63S	TT	2.15	1.85-2.50	93	675	107	699	70001351	

REINFORCED

FRONT/REAR												
16	70001148	3.25-16	55S	TT	2.15	1.85-2.50	89	588	102	610	70001327	
16	70001070	3.50-16	58S	TT	2.15	2.15-2.50	93	598	166	622	70001327	
18	70001144	3.00-18	52S	TT	1.85	1.60-2.15	80	627	92	647	70001347	
18	70001145	3.25-18	59S	TT	2.15	1.85-2.50	89	639	102	661	70001347	70001346
18	70001083	3.50-18	62S	TT	2.15	2.15-2.50	93	649	107	673	70001346	
18	70001142	4.00-18	69S	TT	2.50	2.15-3.00	108	671	124	697	70001349	70001345
19	70001084	4.00-19	71S	TT	2.50	1.85-3.00	108	697	124	723	70001351	



E-06



- Classified M+S for ON/OFF road use and all terrain types.
- Classic Trail tread pattern ensures great durability, grip and performance.
- Recommended for Classic Trail motorcycles.


Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT/REAR											
16	70001018	2.75-16	46S	TT	1.85	1.40-1.85	75	562	86	580	70001328




Gear up your motorbike, enjoy the silence of nature, quiet your mind and focus your body. Off-roading is enchanting, most demanding and oh so very addictive.

XAVIER DE SOULTRAIT

ENDURO TIRE APPLICATION (TERRA FORCE-EF)


TREAD PATTERN	VERSION	STRIPE COLOR	WET ROCKS	GRASS	SAND	CLAY AND MUD	MID-SOFT	LOOSE OVER HARD	STONES / GRAVEL / ROCKS	HARD
										
FRONT										
TERRA FORCE-EF	SUPER									
TERRA FORCE-EF 2 SM	SUPER									
TERRA FORCE-EF 2 SM	SUPER LIGHT									
TERRA FORCE-EF	SUPER LIGHT									
REAR										
TERRA FORCE-EF	SUPER									
TERRA FORCE-EF	SUPER FAST									
TERRA FORCE-EF	SUPER LIGHT									
TERRA FORCE-EF	ULTRA LIGHT									
TERRA FORCE-EF	SUPER SOFT									
TERRA FORCE-EF PRO	SUPER SOFT PRO									



SUPER

Identified by the characteristic yellow stripe: medium carcass construction and compound, especially designed for high speed Enduro, ideal in hard dry conditions.


FAST ENDURO



SUPER FAST

Identified by the characteristic yellow and puprle stripe: medium carcass construction and compound with improved and narrower cross section design, especially designed for high speed Enduro races in dry and hard conditions


FAST ENDURO



SUPER LIGHT

Identified by the characteristic green stripe: light, soft carcass construction and gummy compound, especially designed for medium speed technical Enduro, ideal in wet slippery conditions.

TECHNICAL ENDURO



ULTRA LIGHT

Identified by the characteristic green and puprle stripe: light, soft carcass construction with narrower cross section design and gummy compound, especially designed for medium speed technical Enduro, ideal in wet/semi wet and slippery conditions.

TECHNICAL ENDURO



SUPER SOFT

Identified by the characteristic double green stripe: light carcass construction with ultra gummy compound, especially designed for low speed extreme Enduro, ideal in wet slippery conditions.

XTREME ENDURO



SUPER SOFT PRO

Identified by the characteristic double green and purple stripe: extremely lightweight, ultra-flexible carcass with an ultra-gummy compound provides an increased contact patch for excellent grip in challenging, low-speed technical sections.

XTREME ENDURO

TERRA FORCE-EF

FAST ENDURO **T**ECHNICAL ENDURO **X**TREME ENDURO





TERRA FORCE-EF

- Designed for Enduro FIM competition for all terrain types with best in class performance with outstanding traction, stability and resistance to wear in wet and dry conditions.
- Available in Super & Super Fast (Fast Enduro), Super Light & Ultra Light (Technical Enduro) and Super Soft (Extreme Enduro) versions.
- Recommended for Enduro, Hard Enduro and Dual-Sports motorcycles.
- OE fitment: BETA X-TRAINER, SHERCO ENDURO RACING 250/300cc, STRIX ENDURO, RIEJU MR 300 RACING

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Mousse option 2	Mousse option 3	Tube option 1	Tube option 2
								Design		Max. in service						
								Section width	Overall diameter	Overall width	Overall diameter					
SUPER																
FRONT																
21	70000961	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000893			70001356	70001355
21	70000959	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892			70001356	70001355
REAR																
18	70000951	110/80-18	58M	TT		2.50	2.15-3.00	109	633	136	655	70000882			70001346	70001343
18	70000954	120/90-18	65R	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70000957	140/80-18	70R	TT		3.50	2.75-3.75	142	681	178	707	70000889	70000890	70000895	70001345	70001344
SUPER FAST																
REAR																
18	70001572	140/80-18	70R	TT		3.50	2.75-3.75	142	681	176	707	70000886	70000887		70001344	70001345
SUPER LIGHT																
FRONT																
21	70000960	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000893			70001356	70001355
21	70000958	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892			70001356	70001355
REAR																
18	70000953	120/90-18	65R	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70000956	140/80-18	70R	TT		3.50	2.75-3.75	142	681	178	707	70000889	70000890	70000895	70001345	70001344
ULTRA LIGHT																
REAR																
18	70001573	140/80-18	70R	TT		3.50	2.75-3.75	142	681	176	707	70000886	70000887		70001344	70001345
SUPER SOFT																
REAR																
18	70000952	120/90-18	65M	TT		3.50	2.75-3.75	119	673	149	699	70000886	70000887		70001343	70001344
18	70000955	140/80-18	70M	TT		3.50	2.75-3.75	142	681	178	707	70000889	70000890	70000895	70001345	70001344

TERRA FORCE-EF PRO

XTREME ENDURO



- Designed for Extreme Enduro FIM competition for all techical sections in all terrain types, especially recommended on slippery and rocky off-road terrains. Available in rear only sizes.
- Ultra-soft carcass construction and Super Soft Pro (Extreme Enduro) compound delivering extreme traction and ultimate grip.
- Recommended for Enduro and Hard Enduro motorcycles.

SUPER SOFT PRO

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Mousse option 2	Mousse option 3	Tube option 1	Tube option 2
REAR																
18	70000962	140/80-18	70M	TT		3.50	2.75-3.75	142	681	178	707	70000889	70000890	70000895	70001345	70001344

TERRA FORCE-EF 2 SM

FAST ENDURO TECHNICAL ENDURO

DOT



- Designed for Enduro FIM competition for Soft to Medium terrain types and excellent at absorbing small to large bumps and obstacles.
- Available in Super (Fast Enduro), Super Light (Technical Enduro).
- Recommended for Enduro, Hard Enduro and Dual-Sports motorcycles.

SUPER

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Tube option 1	Tube option 2
FRONT														
21	70000964	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000893	70001356	70001355
21	70001192	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892	70001356	70001355


SUPER LIGHT

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Tube option 1	Tube option 2
FRONT														
21	70000963	90/90-21 (3.00-21)	54R	TT		2.15	1.85-2.50	90	695	99	715	70000893	70001356	70001355
21	70001191	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892	70001356	70001355






ENDURO TIRE APPLICATION

TREAD PATTERN	VERSION	STRIPE COLOR	WET ROCKS	GRASS	SAND	CLAY AND MUD	MID-SOFT	LOOSE OVER HARD	STONES / GRAVEL / ROCKS	HARD	SNOW / ICE
											
FRONT											
TERRA FORCE-EX HT*	ICE	☐									
TERRA FORCE-EX MH	SUPER	■									
TERRA FORCE-EX MH	SUPER LIGHT	■									
TERRA FORCE-EX SM	SUPER LIGHT	■									
REAR											
TERRA FORCE-EX HT*	ICE	☐									
TERRA FORCE-EX MH	SUPER	■									
TERRA FORCE-EX SM	SUPER	■									
TERRA FORCE-EX XT	SUPER	■									
TERRA FORCE-EX MH	SUPER LIGHT	■									
STONE KING											
TERRA FORCE-EX SM	SUPER LIGHT	■									
TERRA FORCE-EX XT	SUPER LIGHT	■									
TERRA FORCE-EX MH	SUPER SOFT	■■									


* Developed for low temperatures



SUPER

Identified by the characteristic yellow stripe: medium carcass construction and compound, especially designed for high speed Enduro, ideal in hard dry conditions.


FAST ENDURO



SUPER LIGHT

Identified by the characteristic green stripe: light, soft carcass construction and gummy compound, especially designed for medium speed technical Enduro, ideal in wet slippery conditions.

TECHNICAL ENDURO



SUPER SOFT

Identified by the characteristic double green stripe: light carcass construction with ultra gummy compound, especially designed for low speed extreme Enduro, ideal in wet slippery conditions.

XTREME ENDURO



ICE

Identified by characteristic white stripe: thicker reinforced carcass with specially formulated compound that remains flexible and elastic even in freezing temperatures down to -10 °C. Perfectly suited for winter riding disciplines such as studded tire use, motoskijoring, and ice motocross.

TERRA FORCE-EX SM

SOFT MEDIUM TERRAIN

FAST ENDURO TECHNICAL ENDURO



- Designed for Enduro Cross competition for all Soft to Medium terrain types with class leading performance, stability and resistance to wear in wet or dry conditions.
- Available in Super (Fast Enduro) and Super Light (Technical Enduro) versions.
- Recommended for Enduro and Dual-Sports motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Mousse option 2	Mousse option 3	Tube option 1	Tube option 2
SUPER																
REAR																
18	70000979	120/90-18	65R	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70001568	140/80-18	70M	TT		3.50	2.75-3.75	142	681	176	707	70000889	70000890	70000895	70001344	70001345
SUPER LIGHT																
FRONT																
21	70000921	80/100-21	51M	TT		1.85	1.60-2.15	80	693	88	713	70000891			70001356	70001355
21	70000980	90/90-21 (3.00-21)	54M	TT		2.15	1.85-2.50	90	695	99	715	70000893			70001356	70001355
REAR																
18	70000977	110/100-18	64R	TT		2.50	2.15-3.00	109	677	136	703				70001343	70001344
18	70000978	120/90-18	65R	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70001569	140/80-18	70M	TT		3.50	2.75-3.75	142	681	176	707	70000889	70000890	70000895	70001344	70001345

2026



TERRA FORCE-EX MH

MEDIUM HARD TERRAIN

FAST ENDURO TECHNICAL ENDURO XTREME ENDURO



- Designed for Enduro Cross competition for all Medium to Hard terrain types with class leading performance, stability and resistance to wear in wet or dry conditions.
- Available in Super (Fast Enduro), Super Light (Technical Enduro) and Super Soft (Extreme Enduro) versions.
- Recommended for Enduro and Dual-Sports motorcycles, including Junior Enduro.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Mousse option 2	Mousse option 3	Tube option 1	Tube option 2
SUPER																
FRONT																
14	70000976	90/90-14	46M	TT		2.15	1.85-2.50	90	518	113	530				70001323	
19	70000971	70/100-19	42M	TT		1.60	1.40-1.85	69	623	86	639				70001351	
21	70001073	80/100-21	51R	TT		1.85	1.60-2.15	80	693	88	713				70001356	70001355
21	70000975	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892			70001356	70001355
REAR																
18	70001071	100/100-18	59R	TT		2.50	2.15-2.75	101	657	126	681				70001344	70001343
18	70001072	110/100-18	64R	TT		2.50	2.15-3.00	109	677	136	703				70001343	70001344
18	70000970	120/90-18	65M	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70001403	120/100-18	68M	TT		2.75	2.50-3.00	119	697	149	725				70001349	70001345
18	70001565	140/80-18	70R	TT		3.50	2.75-3.75	142	681	176	707	70000889	70000890	70000895	70001344	70001345
SUPER LIGHT																
FRONT																
21	70000974	90/100-21	57R	TT		2.15	1.85-2.50	90	713	113	735	70000892			70001356	70001355
REAR																
18	70000965	100/100-18	59M	TT		2.50	2.15-2.75	101	657	126	681				70001344	70001343
18	70000966	110/100-18	64M	TT		2.50	2.15-3.00	109	677	136	703				70001343	70001344
18	70000969	120/90-18	65M	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70000992	120/100-18	68M	TT		2.75	2.50-3.00	119	697	149	725	70000884			70001345	
18	70001566	140/80-18	70R	TT		3.50	2.75-3.75	142	681	176	707	70000889	70000890	70000895	70001344	70001345
SUPER SOFT																
REAR																
12	70000972	90/100-12	46M	TT		2.15	1.85-2.50	90	485	97	507				70001318	70001319
16	70000973	90/100-16	51M	TT		2.15	1.85-2.50	90	586	112,5	608				70001327	70001331
18	70000967	110/100-18	64M	TT		2.50	2.15-3.00	109	677	136	703	70000891			70001343	70001344
18	70000968	120/90-18	65M	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887		70001343	70001344
18	70001404	120/100-18	68M	TT		2.75	2.50-3.00	119	697	149	725					
18	70001567	140/80-18	70M	TT		3.50	2.75-3.75	142	681	176	707	70000889	70000890	70000895	70001344	70001345



PAUL BOLTON

TERRA FORCE-EX XT

XTREME TERRAIN

FAST ENDURO TECHNICAL ENDURO



- Designed for technical Enduro Cross for all Extreme terrains types with class leading performance, excellent traction and resistance to punctures.
- Available in Super (Fast Enduro) and Super Light (Technical Enduro) versions.
- Recommended for Enduro and Dual-Sports motorcycles.

SUPER

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Mousse option 2	Tube option 1	Tube option 2
								Design		Max. in service					
								Section width	Overall diameter	Overall width	Overall diameter				
REAR															
18	70000987	120/90-18	65M	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887	70001343	70001344
19	70000986	110/90-19	62R	TT		2.75	2.15-3.00	109	681	136	705	70000883		70001352	70001351

SUPER LIGHT

REAR															
18	70000981	120/90-18	65M	TT		2.75	2.50-3.00	119	673	149	699	70000886	70000887	70001343	70001344

TERRA FORCE-EX HT

HARD TERRAIN



- Designed for Technical Enduro Cross for all Hard terrain types with class leading performance, excellent traction and resistance to punctures.
- Available in ICE version with a special compound designed to perform even at the lowest temperatures and suitable for studding.
- Recommended for Enduro and Dual-Sports motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Tube option 1	Tube option 2
								Design		Max. in service				
								Section width	Overall diameter	Overall width	Overall diameter			
ICE														
FRONT														
19	70001075	70/100-19	42M	TT	☐	1.60	1.40-1.85	69	623	86	639	70001194	70001351	
21	70000991	90/90-21 (3.00-21)	51M	TT	☐	1.85	1.60-2.15	80	703	92	723		70001356	70001355
REAR														
16	70001074	90/100-16	51M	TT	☐	2.15	1.85-2.50	90	586	112.5	608	70001193	70001327	70001331
18	70000989	110/100-18	64M	TT	☐	2.50	2.15-3.00	109	677	136	703		70001343	70001344
19	70000988	100/90-19	57M	TT	☐	2.50	2.15-2.75	101	663	216	685	70000881	70001351	70001352
19	70000990	110/90-19	62M	TT	☐	2.75	2.15-3.00	109	681	136	705	70000883	70001352	70001351

STONE KING





- Designed specifically for all off-road terrains and rugged trails.
- High performance cut resistant compound with extra large knobbies.
- Recommended for Trail, Enduro and Motocross motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Tube option 1	Tube option 2
							Design		Max. in service				
							Section width	Overall diameter	Overall width	Overall diameter			
REAR													
17	70000985	130/80-17	65N	TT	3.00	2.50-3.50	129	640	161	664		70001337	
18	70000983	120/90-18	71N	TT	2.75	2.50-3.00	119	673	149	699	70000886	70001343	70001344
18	70001570	140/80-18	70M	TT	3.50	2.75-3.75	142	681	176	707	70000889	70001345	70001344
19	70000984	120/90-19	66N	TT	2.75	2.50-3.00	119	699	148	725	70000888	70001350	70001351





MOTOCROSS TIRE APPLICATION

TREAD PATTERN	VERSION	STRIPE COLOUR	SAND/MUD *Sand and/or muddy*	CLAY/MUD *Muddy / sticky with hard race line*	MID-SOFT *Prepared track, conditions stay stable.*	LOOSE OVER HARD *Track becomes hard with lose dirt.*	BLUE GROOVE *Track becomes blue groove*
							
FRONT							
TERRA FORCE-MX SAND							
TERRA FORCE-MX SM							
TERRA FORCE-MX IT	PIT CROSS						
TERRA FORCE-MX MH							
REAR							
TERRA FORCE-MX SAND 2							
TERRA FORCE-MX SM							
TERRA FORCE-MX IT	PIT CROSS						
TERRA FORCE-MX MH							





SAND TERRAIN

Motocross competition tire made from the hardest tread compound for soft and sandy terrain.



SOFT MEDIUM TERRAIN

Motocross competition tire made from a medium hard tread compound for soft to medium terrain.



INTERMEDIATE TERRAIN

Pitcross tire made from softer tread compound for intermediate terrain.



MEDIUM HARD TERRAIN

Motocross competition tire made from the softest tread compound for medium to hard terrain.

TERRA FORCE-MX SAND 2

SAND TERRAIN

NHS



MX SAND 2 MX SAND MX SM

- Designed for Motocross racing in deep soft sandy terrain offering outstanding traction as well as cornering and braking stability.
- High performance hard rubber compound and specially designed carcass with increased lateral support gives it incredible traction and control.
- Recommended for Motocross motorcycles and available only for the rear.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Tube option 1	Tube option 2	
REAR															
12	70001064	80/100-12	50M	TT		1.85	1.60-2.15	80	465	86	485		70001319	70001320	2026
19	70001066	100/90-19	57M	TT		2.50	2.15-2.75	101	663	216	685	70000881	70001351	70001352	
19	70000936	110/90-19	62M	TT		2.75	2.15-3.00	109	681	136	705	70000883	70001351	70001352	



TERRA FORCE-MX SAND

SAND TERRAIN

NHS



MX SAND 2 MX SAND

- Designed for Motocross racing on soft loose terrain types, delivering great traction, control and stability.
- High performance hard rubber compound ensures traction and control.
- Recommended for Motocross motorcycles and available only for the front.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Mousse option 1	Tube option 1	Tube option 2
FRONT														
21	70000950	80/100-21	51M	TT		1.85	1.60-2.15	80	693	88	713	70000891	70001356	70001355



TERRA FORCE-MX SM

SOFT MEDIUM TERRAIN



- Designed for Motocross racing on soft to medium terrains providing class leading traction, control and durability.
- High performance soft rubber compound for outstanding traction and specially designed carcass for optimum control.
- Recommended for Motocross motorcycles including Junior.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Tube option 1	Tube option 2
								Design		Max. in service				
								Section width	Overall diameter	Overall width	Overall diameter			
FRONT														
12	70000940	60/100-12	36M	TT		1.40	1.20-1.60	60	425	75	439		70001320	70001319
14	70000942	70/100-14	40M	TT		1.60	1.40-1.85	69	496	86	512		70001322	70001321
17	70000943	70/100-17	40M	TT		1.60	1.40-1.85	69	572	86	588		70001340	70001334
19	70000944	70/100-19	42M	TT		1.60	1.40-1.85	69	623	86	639		70001351	
21	70000946	80/100-21	51M	TT		1.85	1.60-2.15	80	693	88	713	70000891	70001356	70001355
21	70000949	90/90-21 (3.00-21)	54M	TT		2.15	1.85-2.50	90	695	99	715	70000893	70001356	70001355
REAR														
10	70000941	70/100-10 (2.50-10)	41M	TT		1.60	1.40-1.85	69	394	86	410		70001313	
12	70000945	80/100-12 (2.50-12)	50M	TT		1.85	1.60-2.15	80	465	86	477		70001319	70001320
14	70000947	90/100-14	49M	TT		2.15	1.85-2.50	90	542	113	558		70001323	
16	70000948	90/100-16	51M	TT		2.15	1.85-2.50	90	586	113	608		70001327	70001331
19	70000937	100/90-19	57M	TT		2.50	2.15-2.75	101	663	216	685	70000881	70001351	70001352
19	70000938	110/90-19	62M	TT		2.75	2.15-3.00	109	681	136	705	70000883	70001352	70001351
19	70000939	120/80-19	63M	TT		2.75	2.50-3.00	119	675	149	699	70000885	70001351	70001352

TERRA FORCE-MX MH

MEDIUM HARD TERRAIN



- Designed for Motocross racing on medium to hard terrains providing maximim control and straight-line stability.
- High performance soft rubber compound for maximum traction.
- Recommended for Motocross motorcycles including Junior and Pitcross.
- OE fitment: KAWASAKI KLX230

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Mousse option 1	Tube option 1	Tube option 2
								Design		Max. in service				
								Section width	Overall diameter	Overall width	Overall diameter			
FRONT														
12	70000925	60/100-12	36M	TT		1.40	1.20-1.60	60	425	75	439		70001320	70001319
14	70000926	60/100-14	29M	TT		1.40	1.20-1.60	60	476	75	490		70001322	70001321
17	70000928	70/100-17	40M	TT		1.60	1.40-1.85	69	572	86	588		70001340	70001334
19	70000929	70/100-19	42M	TT		1.60	1.40-1.85	69	623	86	639		70001351	
21	70000931	80/100-21	51M	TT		1.85	1.60-2.15	80	693	88	713	70000891	70001356	70001355
21	70000935	90/90-21 (3.00-21)	54M	TT		2.15	1.85-2.50	90	695	99	715	70000893	70001356	70001355
21	70000934	90/100-21	57M	TT		2.15	1.85-2.50	90	713	113	735	70000892	70001356	70001355
REAR														
10	70000927	70/100-10 (2.50-10)	41M	TT		1.60	1.40-1.85	69	394	86	410		70001313	
12	70000930	80/100-12 (2.50-12)	50M	TT		1.85	1.60-2.15	80	465	86	477		70001319	70001320
14	70000932	90/100-14	49M	TT		2.15	1.85-2.50	90	542	113	558		70001323	
16	70000933	90/100-16	51M	TT		2.15	1.85-2.50	90	586	113	608		70001327	70001331
19	70000922	100/90-19	57M	TT		2.50	2.15-2.75	101	663	216	685	70000881	70001351	70001352
19	70000923	110/90-19	62M	TT		2.75	2.15-3.00	109	681	136	705	70000883	70001352	70001351
19	70000924	120/80-19	63M	TT		2.75	2.50-3.00	119	675	149	699	70000885	70001351	70001352

TERRA FORCE-MX MH

MEDIUM HARD TERRAIN




- Designed for Motocross racing on medium to hard terrains providing maximim control and straight-line stability.
- High performance soft rubber compound for maximum traction.
- Recommended for Motocross motorcycles including Junior and Pitcross.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
PIT CROSS													
FRONT													
14	70001000	90/90-14	46M	TT		2.15	1.85-2.50	90	518	113	530	70001323	
REAR													
12	70000999	90/100-12	46M	TT		2.15	1.85-2.50	90	485	97	507	70001318	70001319

TERRA FORCE-MX IT


INTERMEDIATE TERRAIN



- New pattern design for Pitcross racing on intermediate terrains, providing maximum control and straight-line stability.
- High performance soft rubber compound for maximum traction.
- Best in class tire specifically designed and developed for most demanding Pitcross riders.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
PIT CROSS													
FRONT													
14	70001367	90/90-14	46M	TT		2.15	1.85-2.50	90	518	113	530	70001323	
REAR													
12	70001366	90/100-12	46M	TT		2.15	1.85-2.50	90	485	97	507	70001318	70001319

TRIAL 2026

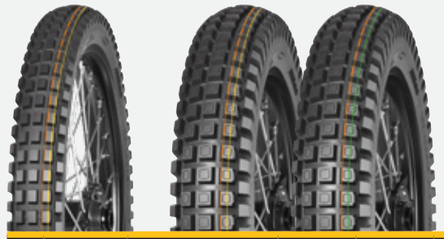


- Designed specifically for Trial competition on all terrain types and conditions.
- High performance soft compound and low pressure carcass for maximum traction and control.
- Recommended for Trial motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
								Design		Max. in service			
								Section width	Overall diameter	Overall width	Overall diameter		
SOFT													
FRONT													
21	70001078	80/100-21 (2.75-21)	51M	TL/TT		1.85	1.40-1.85	75	689	86	707	70001356	70001355
REAR													
18	70001076	120/100R18 (4.00R18)	68M	TL/TT		2.50	1.85-3.00	108	671	124	697	70001345	
X-PRO													
REAR													
18	70001077	120/100R18 (4.00R18)	68M	TL/TT		2.50	1.85-3.00	108	671	124	697	70001345	



SPEEDWAY

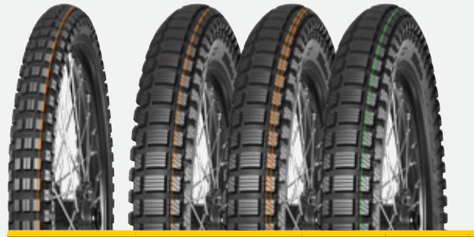

- Designed specifically for FIM Speedway racetrack use.
- High performance compound ensures optimal traction and control.
- Recommended for Speedway motorcycles including LongTrack and Junior.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1	Tube option 2
REAR													
19	70001139	3.75-19	61P	TT	■	2.15	/	99	697	129	711	70001351	
19	70001140	3.75-19	61P	TL	■■	2.15	/	99	697	129	711	70001351	
SOFT													
FRONT													
23	70000997	2.75-23	48P	TT	■	1.85	/	75	715	86	733		
REAR													
17	70000998	3.00-17	50P	TT	■	1.85	/	80	602	92	711	70001336	70001335
19	70001190	3.75-19	61P	TT	■■	2.15	/	99	697	129	711	70001351	
22	70000996	2.75-22	50R	TT	■	1.85	/	75	740	86	758		



FLAT TRACK



- Designed specifically for Flat Track racetrack use with specific versions also for road use.
- Available in different high performance compound options to ensure optimal traction and control.
- Recommended for Flat Track motorcycles.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1
SOFT												
FRONT/REAR												
19	70001079	130/80-19 (27×7-19)	NHS	TT	■■	3.00	2.50-3.50	129	691	142	705	70001351
REAR												
19	70001081	140/80-19 (27.5×7.5-19)	NHS	TT	■■	3.50	2.75-3.75	142	707	156	723	70001350
SUPER SOFT												
FRONT/REAR												
19	70001080	130/80-19 (27×7-19)	NHS	TT	■■	3.00	2.50-3.50	129	691	142	705	70001351
REAR												
19	70001082	140/80-19 (27.5×7.5-19)	NHS	TT	■■	3.50	2.75-3.75	142	707	156	723	70001350
STREET												
FRONT/REAR												
19	70001058	130/80-19 (27×7-19)	71H	TL/TT		3.00	2.50-3.50	129	691	142	705	70001351
REAR												
19	70001059	140/80-19 (27.5×7.5-19)	71H	TL/TT		3.50	2.75-3.75	142	707	156	723	70001350



ERVIN KRAJČOVIČ
2025 FIM Flat Track World Champion



Big cities, small towns, vast roads or narrow streets - the scooter goes everywhere and anywhere. Surrendering into the incredible feel of wind in your hair and the taste of freedom in the air.

TOURING FORCE-SC 2



- Upgraded from the Mitas TOURING FORCE-SC to tackle the challenges of urban commuting on all paved road types and in all weather conditions.
- Improved pattern design ensures a smooth ride, optimal grip, and extended durability.
- Designed for all types of sports and classic scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
11	70001237	110/70-11	45P	TL/TT	3.00	2.50-3.50	110	433	121	442	70001357	
12	70001219	110/70-12	47S	TL/TT	3.00	2.50-3.50	110	459	119	469		
14	70001226	150/70-14	66S	TL/TT	4.25	3.50-4.50	151	566	166	580		
16	70001399	110/70-16	52S	TL/TT	3.00	2.50-3.50	110	560	121	570	70001332	
16	70001227	120/70-16	57S	TL/TT	3.50	2.75-3.75	122	574	134	586	70001332	
REINFORCED												
REAR												
14	70001402	140/60-14	64S	TL/TT	3.75	3.50-4.50	139	524	153	536	70001324	
14	70001401	140/70-14	68S	TL/TT	3.75	3.50-4.50	139	552	153	566	70001325	
FRONT/REAR												
12	70001223	120/70-12	58S	TL/TT	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70001244	130/70-12	64S	TL/TT	3.50	3.00-4.00	129	487	139	499	70001359	70001358
13	70001400	110/70-13	54S	TL/TT	3.00	2.50-3.50	110	484	121	494		
WHITE WALL												
FRONT/REAR												
12	70001225	120/70-12	58S	TL/TT	3.50	2.75-3.75	122	473	132	485	70001359	70001358

2026



TOURING FORCE-SC



- Designed for the challenges of urban commuting on all paved road types and in all weather conditions.
- Special tread compound ensures long service life and optimal grip.
- Designed for all types of sports and classic scooters.
- OE fitment: PIAGGIO BEVERLY 400S, PEUGEOUT PULSION EVO 125cc

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
12	70000637	110/90-12	64P	TL*	2.50	2.15-3.00	109	503	118	517	70001359	70001358
13	70000638	110/90-13	56P	TL*	2.50	2.15-3.00	109	528	120	542		
13	70000643	120/70-13	53L	TL*	3.50	2.75-3.75	122	498	134	510		
13	70000644	120/70-13	53P	TL*	3.50	2.75-3.75	122	498	134	510		
15	70000649	120/70-15	56S	TL*	3.50	2.75-3.75	122	549	134	561		
16	70000650	120/70-16	57P	TL*	3.50	2.75-3.75	122	574	134	586	70001332	
16	70000651	120/70-16	57S	TL*	3.50	2.75-3.75	122	574	134	586	70001332	
REAR												
10	70000663	130/90-10	61L	TL*	3.00	2.50-3.50	129	488	139	504	70001357	
13	70000664	140/60-13	57L	TL*	3.75	3.50-4.50	139	498	153	510	70001359	70001358
13	70000674	150/70-13	64S	TL*	4.25	3.50-4.50	151	540	166	554	70001358	70001359
14	70000675	150/70-14	66S	TL*	4.25	3.50-4.50	151	566	166	580		
15	70001434	130/80-15	63S	TL*	3.00	2.50-3.50	129	589	142	603	70001326	
16	70000653	120/80-16	60P	TL*	2.75	2.50-3.00	119	598	131	612	70001332	
16	70001098	130/70R16	61S	TL	3.50	3.00-4.00	129	588	142	600		
16	70000672	140/70-16	65P	TL*	3.75	3.50-4.50	139	602	153	616	70001333	
16	70000673	140/70-16	65S	TL*	3.75	3.50-4.50	139	602	153	616	70001333	
16	70001197	130/70-16	61S	TL	3.50	3.00-4.00	129	588	142	600	70001332	
FRONT/REAR												
10	70000626	100/80-10	53L	TL*	2.50	2.15-2.75	101	414	109	426	70001313	70001314
10	70000639	120/70-10	54L	TL*	3.50	2.75-3.75	122	422	132	434	70001357	
10	70000654	120/90-10	66L	TL*	2.75	2.50-3.00	119	470	129	486	70001357	

TOURING FORCE-SC

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000676	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
10	70000682	90/90-10	50J	TL*	2.15	1.85-2.50	90	416	97	428	70001313	70001314
10	70001196	90/90-10	50M	TL*	2.15	1.85-2.50	90	416	97	428	70001313	70001314
12	70000630	110/70-12	47P	TL*	3.00	2.50-3.50	110	459	119	469		
12	70000635	110/80-12	61L	TL*	2.50	2.15-3.00	109	481	118	493		
12	70000640	120/70-12	51L	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000641	120/70-12	51S	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000658	130/70-12	56L	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358
13	70000632	110/70-13	48S	TL*	3.00	2.50-3.50	110	484	121	494		
13	70000655	130/60-13	53J	TL*	3.50	3.00-4.00	129	486	142	496	70001359	70001358
14	70000647	120/70-14	55S	TL*	3.50	2.75-3.75	122	524	134	536	70001324	
14	70000652	120/80-14	58S	TL*	2.75	2.50-3.00	119	548	131	562	70001324	
14	70000679	80/90-14	40P	TL*	1.85	1.60-2.15	80	500	88	510	70001322	
14	70000683	90/90-14	46P	TL*	2.15	1.85-2.50	90	518	99	530	70001323	
16	70000627	100/80-16	50P	TL*	2.50	2.15-2.75	101	566	111	578	70001331	
16	70000633	110/70-16	52P	TL*	3.00	2.50-3.50	110	560	121	570	70001332	
16	70000634	110/70-16	52S	TL*	3.00	2.50-3.50	110	560	121	570	70001332	

REINFORCED

REAR												
10	70000657	130/70-10	59P	TL*	3.50	3.00-4.00	129	436	139	448	70001357	
12	70000668	140/70-12	65P	TL*	4.00	3.50-4.50	141	501	152	515	70001359	70001358
13	70000665	140/60-13	63P	TL*	3.75	3.50-4.50	139	498	153	510	70001359	70001358
14	70000666	140/60-14	64P	TL*	3.75	3.50-4.50	139	524	153	536	70001324	
14	70000667	140/60-14	64S	TL*	3.75	3.50-4.50	139	524	153	536	70001324	
14	70000669	140/70-14	68P	TL*	3.75	3.50-4.50	139	552	153	566	70001325	
14	70000670	140/70-14	68S	TL*	3.75	3.50-4.50	139	552	153	566	70001325	
15	70000671	140/70-15	69P	TL*	3.75	3.50-4.50	139	577	142	591		
FRONT/REAR												
10	70001195	100/90-10	61M	TL*	2.50	2.15-2.75	101	434	109	444	70001357	70001314
12	70000631	110/70-12	56M	TL*	3.00	2.50-3.50	110	459	119	469		
12	70000642	120/70-12	58P	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000659	130/70-12	64P	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358
13	70000656	130/60-13	60P	TL*	3.50	3.00-4.00	129	486	142	496	70001359	70001358
13	70001664	130/70-13	63S	TL/TT	3.50	3.00-4.00	129	512	142	524	70001359	70001358
14	70001586	100/70-14	53P	TL*	2.50	2.50-3.00	100	498	110	507	70001322	
14	70000629	100/90-14	57P	TL*	2.50	2.15-2.75	101	536	111	548	70001324	
14	70000677	80/80-14	53L	TL*	1.85	1.60-2.15	80	484	88	492	70001322	
14	70001433	110/80-14	59S	TL*	2.50	2.15-3.00	109	532	120	544	70001324	
16	70000678	80/80-16	45P	TL*	1.85	1.60-2.15	80	534	88	542	70001328	
16	70000680	80/90-16	48P	TL*	1.85	1.60-2.15	80	550	88	560	70001327	70001328
16	70001435	90/80-16	51S	TL*	2.15	1.85-2.50	90	550	99	560	70001328	

ENDURO TRAIL - ADV 2

2026



- 70% road & 30% light off-road performance with an adventure-inspired tread pattern for versatile riding.
- Dependable wet-weather grip and confidence across a wide range of riding conditions.
- Stable, comfortable handling and durability for daily commuting and longer adventures.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT												
15	70001834	120/70-15	56P	TL/TT	3.50	2.75-3.75	122	549	134	561		
16	70001574	120/70-16	57S	TL/TT	3.50	2.75-3.75	122	574	134	586		
17	70001584	120/70ZR17	58W	TL/TT	3.50	3.50-3.75	122	600	131	612		
REAR												
14	70001835	140/70-14	62P	TL/TT	3.75	3.50-4.50	139	628	153	642		
14	70001575	150/70-14	66S	TL/TT	4.25	3.50-4.50	151	566	166	580		
15	70001459	160/60R15	67V	TL/TT	4.50	4.25-5.00	161	573	172	587		



MC-20 MONSUM



- Designed for the challenges of urban commuting on all paved and un-paved road types and even in the most extreme weather conditions.
- Special M+S tread design and compound ensure long service life and optimal grip and also available is special versions for racing.
- Designed for all types of sports and classic scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
11	70000689	110/70-11	45L	TL*	3.00	2.50-3.50	110	433	121	442	70001357	
11	70000693	120/70-11	56L	TL*	3.50	2.75-3.75	122	447	132	459	70001357	
12	70001705	90/90-12	54P	TL*	2.15	1.85-2.50	90	467	97	479		

WHITE WALL

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000702	3.50-10	54L	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
10	70000692	120/70-10	51P	TL*	3.50	2.75-3.75	122	422	132	434	70001357	
11	70000690	110/70-11	45L	TL*	3.00	2.50-3.50	110	433	121	442	70001357	
11	70000694	120/70-11	56L	TL*	3.50	2.75-3.75	122	447	132	459	70001357	
12	70000696	120/70-12	58P	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000699	130/70-12	62P	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358

MC-17



- Designed for commuting on all paved and un-paved road types in all weather conditions.
- Special durable compound delivers traction, stability, and comfort even at high speeds.
- Designed for all types of scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT/REAR											
10	70000684	120/90-10	56J	TL*	2.75	2.50-3.00	119	470	129	486	70001357
10	70000685	130/90-10	61J	TL*	3.00	2.50-3.50	129	488	139	504	70001357
10	70000686	150/80-10	65L	TL*	3.50	3.00-4.25	150	494	165	510	

MC-19



- Designed for commuting on all paved and un-paved road types in all weather conditions.
- Special durable compound delivers traction, stability, and comfort even at high speeds.
- Designed for all types of scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
12	70000687	120/80-12	55J	TL*	2.75	2.50-3.00	119	497	129	511	70001359	70001358
12	70000688	130/80-12	60J	TL*	3.00	2.50-3.50	129	513	139	527	70001359	70001358

MC-32 WINSCOOT



- Designed for the challenges of commuting on both on-road and off-road, even in the most extreme weather conditions.
- Aggressive M+S tread design, sipes and high-performance winter compound ensure greater traction and optimal grip at low temperature on snow.
- Designed for all types of scooters. Suitable for winter stud installation.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000715	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
12	70000710	120/70-12	58P	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000714	130/70-12	62P	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358
13	70000713	130/60-13	60P	TL*	3.50	3.00-4.00	129	486	142	496	70001359	70001358
14	70000716	80/80-14	59P	TL/TT	1.85	1.60-2.15	80	484	88	492		
14	70000708	110/80-14	53L	TL/TT	2.50	2.15-3.00	109	532	120	544		
16	70000717	90/80-16	52P	TL/TT	2.15	1.85-2.50	90	550	99	560	70001328	



MC-35 S-RACER 2.0



- Designed to race, yet ready to be used on public roads.
- High performance rubber compound ensures excellent grip in cornering and acceleration. Available in Standard, Medium, Soft and Super Soft compound versions.
- Designed for all types of racing and sports scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000758	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
10	70001165	100/90-10	56P	TL*	2.50	2.15-2.75	101	434	109	444	70001357	70001314
12	70000750	100/90-12	49P	TL*	2.50	2.15-2.75	101	485	109	497	70001320	70001319
12	70000754	120/80-12	55P	TL*	2.75	2.50-3.00	119	497	129	511	70001359	70001358

SOFT

FRONT/REAR												
10	70000756	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
12	70000748	100/90-12	49P	TL*	2.50	2.15-2.75	101	485	109	497	70001320	70001319
12	70000752	120/80-12	55P	TL*	2.75	2.50-3.00	119	497	129	511	70001359	70001358

MEDIUM

FRONT/REAR												
10	70000755	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
10	70000746	100/90-10	56P	TL*	2.50	2.15-2.75	101	434	109	446	70001357	70001314
12	70000747	100/90-12	49P	TL*	2.75	2.15-2.75	119	497	129	511	70001320	70001319
12	70000751	120/80-12	55P	TL*	2.75	2.50-3.00	119	497	129	511	70001359	70001358

SUPER SOFT

FRONT/REAR												
10	70000757	3.50-10	51P	TL*	2.50	2.15-2.50	92	437	99	448	70001313	70001314
12	70000749	100/90-12	49P	TL*	2.50	2.15-2.75	101	485	109	497	70001320	70001319
12	70000753	120/80-12	55P	TL*	2.75	2.50-3.00	119	497	129	511	70001359	70001358

SCOOTER RACING

MC-34



- Designed for street racing perfect sport option on paved roads.
- High performance rubber compound ensures excellent grip in cornering and acceleration. Available in Standard and Super Soft compound versions.
- Designed for all types of racing and sports scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000745	90/90-10	50P	TL*	2.15	1.85-2.50	90	416	97	428	70001313	70001314
10	70000738	100/90-10	56P	TL*	2.50	2.15-2.75	101	434	109	446	70001357	70001314
12	70000739	110/70-12	53P	TL*	3.00	2.50-3.50	110	459	119	469	70001358	
12	70000741	120/70-12	51P	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000743	130/70-12	62P	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358

SUPER SOFT

FRONT/REAR												
10	70000744	90/90-10	50P	TL*	2.15	1.85-2.50	90	416	97	428	70001313	70001314
12	70000740	120/70-12	51P	TL*	3.50	2.75-3.75	122	473	132	485	70001359	70001358
12	70000742	130/70-12	62P	TL*	3.50	3.00-4.00	129	487	139	499	70001359	70001358

MC-20 MONSUM



- Special version of the range developed for wet track racing.
- High performance soft rubber compound ensures outstanding grip and excellent stability at high speeds on wet surfaces.
- Designed for racing scooters.

RACING RAIN

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Stripe colour	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1	Tube option 2
FRONT/REAR													
10	70000761	3.50-10	51P	TL*		2.50	2.15-2.50	92	437	99	448	70001313	70001314
12	70000759	100/90-12	49P	TL*		2.50	2.15-2.75	101	485	109	497	70001320	70001319
12	70000760	120/80-12	55P	TL*		2.75	2.50-3.00	119	497	129	511	70001359	70001358

MC-12



- Designed for daily commuting and suitable even for more challenging paved road conditions.
- Special compound delivers great performance, traction and comfort.
- Designed for classic scooters.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm) Design Section width	Design Overall diameter	Max. in service Overall width	Max. in service Overall diameter	Tube option 1	Tube option 2
FRONT/REAR												
10	70000718	3.00-10	42J	TL/TT	2.15	1.85-2.50	80	413	86	422	70001313	70001314

WHITE WALL

FRONT/REAR												
10	70000719	3.00-10	42J	TL/TT	2.15	1.85-2.50	80	413	86	422	70001313	70001314





B-13



- Designed for daily commuting for all paved road types in all weather conditions*.
- Special compound delivers traction, stability and comfort.
- Designed for classic scooters.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT/REAR											
8	70000720	3.50-8	46J	TT	2.50	2.15-2.50	92	386	99	397	70001312
8	70000724	4.00-8C	71J	TT	2.50	2.50-3.00	108	415	117	427	70001312
8	70000723	4.00-8C	71J	TL/TT	2.50	2.50-3.00	108	415	117	427	70001312

WHITE WALL

FRONT/REAR											
8	70000721	3.50-8	46J	TT	2.50	2.15-2.50	92	386	99	397	70001312
8	70000722	4.00-8C	66J	TT	2.50	2.50-3.00	108	415	117	427	70001312

S-05



- Designed for daily commuting for all paved road types in all weather conditions*.
- Special compound delivers traction, stability and comfort.
- Designed for classic scooters.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
12	70000730	3.25-12	55J	TT	2.15	1.60-2.15	88	475	95	487	70001320	70001319
12	70000731	3.50-12	64J	TT	2.50	2.15-2.50	92	488	99	501	70001320	70001319

B-14



- Designed for daily commuting for all paved road types in all weather conditions*.
- Special compound delivers traction, stability and comfort.
- Designed for classic scooters.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
10	70000726	3.50-10	59J	TT	2.50	2.15-2.50	92	437	99	448	70001313	70001314
10	70000728	4.00-10C	74J	TL/TT	2.50	2.50-3.00	114	465	120	480	70001357	

WHITE WALL

FRONT/REAR												
10	70000725	3.50-10	51J	TT	2.50	2.15-2.50	92	437	99	448	70001313	70001314

MC-5




- Designed for daily commuting for all paved road types in all weather conditions*.
- Special compound delivers traction, stability and comfort.
- Designed for classic scooters.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
12	70000729	3.00-12	47J	TT	2.15	1.85-2.50	80	464	86	473	70001320	70001319



B-8



- Designed for urban daily commuting on all paved roads in all weather conditions.*
- Special compound ensures great traction, stability and extreme durability.
- Designed for mopeds and motorcycles of low and medium engine capacity.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 1
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
16	70000795	2 1/4-16 (2.25-16)	42J	TT	1.50	1.20-1.60	62	532	66	540	70001330	70001329
16	70000794	2 1/2-16 (2.50-16)	42J	TT	1.50	1.35-1.60	68	548	72	558	70001328	70001329

WHITE WALL

FRONT/REAR												
16	70000796	2 1/4-16 (2.25-16)	38J	TT	1.50	1.20-1.60	62	532	66	540	70001330	70001329

B-7



- Designed for urban daily commuting on all paved roads in all weather conditions.*
- Special compound ensures great traction, stability and extreme durability.
- Designed for mopeds and motorcycles of low and medium engine capacity.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000793	2 3/4-17 (2.75-17)	47J	TL/TT	1.85	1.40-1.85	75	584	80	594	70001340	70001334

WHITE WALL

FRONT/REAR												
17	70000792	2 3/4-17 (2.75-17)	47J	TL/TT	1.85	1.40-1.85	75	584	80	594	70001340	70001334

B-4



- Designed for urban daily commuting on all paved roads in all weather conditions.*
- Special compound ensures great traction, stability and extreme durability.
- Designed for mopeds and motorcycles of low and medium engine capacity.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000788	2 1/4-17 (2.25-17)	39J	TT	1.50	1.20-1.60	62	558	66	566	70001339	70001329
17	70000787	2 1/2-17 (2.50-17)	43J	TT	1.50	1.35-1.60	68	574	72	584	70001340	70001334
18	70000790	2 1/4-18 (2.25-18)	42J	TT	1.50	1.20-1.60	62	583	66	591	70001348	

WHITE WALL

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000789	2 1/4-17 (2.25-17)	39J	TT	1.50	1.20-1.60	62	558	66	566	70001339	70001329
18	70000791	2 1/4-18 (2.25-18)	42J	TT	1.50	1.20-1.60	62	583	66	591	70001348	

B-3




- Designed for urban daily commuting on all paved roads in all weather conditions.*
- Special compound ensures great traction, stability and extreme durability.
- Designed for mopeds and motorcycles of low and medium engine capacity.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1
							Design		Max. in service		
							Section width	Overall diameter	Overall width	Overall diameter	
FRONT/REAR											
18	70000786	2 1/2-18 (2.50-18)	43J	TT	1.50	1.35-1.60	68	599	72	609	70001348

MC-11



- Designed for sporty riding and urban daily commuting ready to tackle any weather conditions.*
- Special rubber compound delivers a reliable grip and stability, confident handling and great durability.
- Designed for mopeds.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000778	2-17 (2.00-17)	31J	TT	1.35	1.20-1.35	55	544	58	552	70001329	70001339
18	70000779	2.50-18	45P	TT	1.50	1.35-1.60	64	593	74	605	70001348	

WHITE WALL

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000774	2 1/4-17 (2.25-17)	39J	TT	1.50	1.20-1.60	62	558	66	566	70001339	70001329
17	70000773	2 1/2-17 (2.50-17)	43J	TL/TT	1.50	1.35-1.60	68	574	72	584	70001340	70001334
17	70000777	2 3/4-17 (2.75-17)	47J	TL/TT	1.85	1.40-1.85	75	584	80	594	70001340	70001334



MC-2

- Designed for sporty riding and urban daily commuting ready to tackle any weather conditions.*
- Special rubber compound delivers a reliable grip and stability, confident handling and great durability.
- Designed for mopeds.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
16	70000782	2 1/4-16 (2.25-16)	38J	TT	1.50	1.20-1.60	62	532	66	540	70001330	70001329
16	70000780	2 1/2-16 (2.50-16)	42J	TL/TT	1.50	1.35-1.60	68	548	72	558	70001328	70001329
16	70000783	2 3/4-16 (2.75-16)	46J	TL/TT	1.85	1.40-1.85	75	558	80	568	70001328	

WHITE WALL

FRONT/REAR												
16	70000781	2 1/2-16 (2.50-16)	42J	TL/TT	1.50	1.35-1.60	68	548	72	558	70001328	70001329
16	70000784	2 3/4-16 (2.75-16)	46J	TL/TT	1.85	1.40-1.85	75	558	80	568	70001328	



MC-51 MEDITERRA

- Designed for urban and city commuting on all paved and un-paved road types in all weather conditions.*
- Special reinforced compound ensures amazing grip, durability and great handling.
- Designed for mopeds and motorcycles of low and medium engine capacity.

*Not recommended on ice and/or snow.

Inch	Code	Tire size	LI/SS	Type (TL/TT)	Measuring rim width	Permitted rim width range	Tire dimensions E.T.R.T.O. (mm)				Tube option 1	Tube option 2
							Design		Max. in service			
							Section width	Overall diameter	Overall width	Overall diameter		
FRONT/REAR												
17	70000799	2.50-17	43P	TL*	1.50	1.35-1.60	64	568	70	580	70001340	70001334
17	70000800	2.75-17	47P	TL*	1.85	1.40-1.85	75	588	81	600	70001340	70001334



Inch	Code	Equivalent size	Version	Thickness (mm)	Valve	Packing (pcs)
8	70001312	3.50-8 | 4.00-8	STANDARD DUTY	1.5	JS 87 90/90	20
10	70001314	2.50-10 | 2.75-10 | 3.00 10- | 3.25-10 | 3.50-10 | 90/90-10 | 100/80-10 | 100/90-10	HEAVY DUTY	2.0	TR4	20
10	70001315	120/70-10 | 120/90-10 | 130/70-10	STANDARD DUTY	1.5	JS 87N 90/90	20
10	70001317	2.50-10 | 2.75-10 | 3.00-10 | 3.50-10 | 90/90-10 | 100/80-10 | 100/90-10	STANDARD DUTY	1.5	JS 87Cl 90/90	20
10	70001313	2.50-10 | 2.75-10 | 3.00-10 | 3.25-10 | 3.50-10 | 70/100-10 | 80/90-10 | 90/90-10 | 100/80-10 | 100/90-10	STANDARD DUTY	1.5	JS 87N 90/90	20
10	70001316	4.10-10 | 130/90-10 | 150/80-10	STANDARD DUTY	1.5	JS 87N 90/90	20
10/11	70001357	4.00-10 | 100/90-10 | 110/80 10- | 110/90-10 | 120/70-10 | 120/80-10 | 120/90-10 | 130/70-10 | 130/80-10 130/90-10 | 110/70-11 | 120/70-11 | 130/70-11	STANDARD DUTY	1.5	JS 87N 90/90	20
12	70001319	2.50-12 | 2.75-12 | 3.00-12 | 3.25-12 | 3.50-12 | 60/100- | 70/100-12 | 80/100-12 | 90/100-12 | 100/90-12	HEAVY DUTY	2.0	TR6	20
12	70001318	2.50-12 | 2.75-12 | 3.00-12 | 3.25-12 | 3.50-12 | 60/100-12 | 70/100-12 | 80/100-12 | 90/90-12 | 90/100-12 100/80-12 | 100/90-12	STANDARD DUTY	1.5	TR4	20
12	70001320	2.50-12 | 2.75-12 | 3.00-12 | 3.25-12 | 3.50-12 | 60/100-12 | 70/100-12 | 80/100-12 | 90/100-12 | 100/90-12	STANDARD DUTY	1.5	JS 87N 90/90	20
12/13	70001358	4.00-12 | 4.25-12 | 4.50-12 | 110/90-12 | 120/70-12 | 120/80-12 | 130/70-12 | 130/80-12 | 140/70-12 | 140/70-13 150/70-13	STANDARD DUTY	1.5	JS 87N 45/90	20
12/13	70001359	4.00-12 | 4.25-12 | 4.50-12 | 110/90-12 | 120/70-12 | 120/80-12 | 130/70-12 | 130/80-12 | 140/70-12 | 140/70-13 150/70-13	STANDARD DUTY	1.5	JS 87N 90/90	20
14	70001321	2.25-14 | 2.50-14 | 2.75-14 | 60/100-14 | 70/100-14	HEAVY DUTY	2.0	TR6	20
14	70001323	3.60-14 | 4.10-14 | 90/90-14 | 90/100-14	HEAVY DUTY	2.0	TR6	20
14	70001324	100/80-14 | 100/90-14 | 110/70-14 | 110/80-14 | 120/70-14 | 120/80-14 | 140/60-14	STANDARD DUTY	1.5	TR6	20
14	70001325	140/70-14	STANDARD DUTY	1.5	TR6	20
14	70001322	2.25-14 | 2.50-14 | 2.75-14 | 60/100-14 | 70/90-14 | 70/100-14 | 80/80-14 | 80/90-14 | 80/100-14 | 90/80-14 100/70-14	STANDARD DUTY	1.5	TR4	20
15	70001326	130/80-15 | 130/90-15 | 140/90-15 | 150/90-15	STANDARD DUTY	1.5	TR6	12
15	70001360	170/80-15	STANDARD DUTY	1.5	TR6	12
16	70001331	3.00-16 | 90/90-16 | 90/100-16 | 100/80-16	HEAVY DUTY	2.0	TR6	20
16	70001333	140/70-16 | 140/90-16 | 150/80-16 | 5.00-16 | MT90-16 | MU90-16 | MU85-16	STANDARD DUTY	1.5	TR6	12
16	70001330	2.25-16 | 60/100-16	STANDARD DUTY	1.5	TR4	20
16	70001328	2.50-16 | 2.75-16 | 80/80-16 | 80/90-16 | 80/100-16 | 90/80-16 | 90/90-16	STANDARD DUTY	1.5	TR4	20
16	70001327	3.00-16 | 3.25-16 | 3.50-16 | 80/90-16 | 90/90-16 | 90/100-16	STANDARD DUTY	1.5	TR6	20
16	70001332	4.00-16 | 4.60-16 | 5.00-16 | 100/80-16 | 100/100-16 | 110/70-16 | 110/90-16 | 120/70-16 | 120/80-16 120/90-16 | 130/70-16 | 130/80-16 | 130/90-16	STANDARD DUTY	1.5	TR6	20
16/17	70001329	2.00-16 | 2.25-16 | 2.50-16 | 2.00-17 | 2.25-17 | 2.50-17	STANDARD DUTY	1.5	TR4	20
17	70001334	2.50-17 | 2.75-17 | 70/100-17 | 80/90-17 | 80/100-17 | 90/80-17	HEAVY DUTY	2.0	TR6	20
17	70001336	3.00-17 | 3.25-17 | 3.60-17 | 90/80-17 | 90/90-17 | 90/100-17 | 100/80-17 | 110/70-17 | 110/80-17 | 120/60-17 120/65-17 | 120/70-17	HEAVY DUTY	2.0	TR6	20
17	70001335	3.00-17 | 3.50-17 | 90/90-17 | 90/100-17 | 100/70-17 | 100/80-17 | 110/90-17	HEAVY DUTY	2.0	TR6	20
17	70001337	4.00-17 | 4.25-17 | 4.50-17 | 5.00-17 | 5.10-17 | 6.10-17 | 4.25/80-17 | 110/90-17 | 120/80-17 | 120/90-17 130/70-17 | 130/80-17 | 130/90-17 | 140/70-17 | 140/80-17 | 140/90-17 | 150/60-17 | 150/70-17 | 150/80-17 150/90-17 | 160/60-17 | 170/60-17	HEAVY DUTY	2.0	TR6	20
17	70001339	2.00-17 | 2.25-17 | 60/100-17	STANDARD DUTY	1.5	TR4	20
17	70001340	2.50-17 | 2.75-17 | 70/100-17 | 80/90-17 | 80/100-17 | 90/80-17 | 100/70-17 | 100/80-17	STANDARD DUTY	1.5	TR6	20
17	70001338	4.00-17 | 4.25-17 | 4.50-17 | 5.00-17 | 5.10-17 | 6.10-17 | 4.25/80-17 | 110/90-17 | 120/80-17 | 120/90-17 130/70-17 | 130/80-17 | 130/90-17 | 140/70-17 | 140/80-17 | 140/90-17 | 150/60-17 | 150/70-17 150/80-17 | 150/90-17 | 160/60-17	STANDARD DUTY	1.5	TR6	20

TUBES

Inch	Code	Equivalent size	Version	Thickness (mm)	Valve	Packing (pcs)
18	70001345	4.00-18 | 4.25-18 | 4.50-18 | 4.60-18 | 4.25/85-18 | 110/90-18 | 110/100-18 | 120/80-18 | 120/90-18 | 120/100-18 130/80-18 | 130/90-18 | 140/80-18 | 150/70-18	HEAVY DUTY	2.0	TR6	20
18	70001343	4.00-18 | 4.25-18 | 4.50-18 | 4.75-18 | 5.00-18 | 100/100-18 | 110/80-18 | 110/90-18 | 110/100-18 | 120/80-18 120/90-18 | 120/100-18 | 130/80-18	HEAVY DUTY	2.0	TR6	20
18	70001348	2.25-18 | 2.50-18	STANDARD DUTY	1.5	TR4	20
18	70001347	2.75-18 | 3.00 18- | 3.25-18 | 80/90-18 | 80/100-18 | 90/80-18 | 90/90-18 | 90/100-18 | 100/80-18 | 100/90-18 100/100-18 | 110/80-18	STANDARD DUTY	1.5	TR6	20
18	70001346	3.25-18 | 3.50-18 | 4.00-18 | 4.10-18 | 90/90-18 | 90/100-18 | 100/80-18 | 100/90-18 | 100/100-18 | 110/80-18 110/90-18 | 110/100-18 | 120/80-18 | 120/90-18 | 120/100-18 | 130/80-18	STANDARD DUTY	1.5	TR6	20
18	70001349	4.00-18 | 4.25-18 | 4.50-18 | 4.75-18 | 5.00-18 | 100/100-18 | 110/80-18 | 110/90-18 | 110/100-18 | 120/80-18 120/90-18 | 120/100-18 | 130/80-18	STANDARD DUTY	1.5	TR6	20
18	70001344	100/100-18 | 110/100-18 | 120/80-18 | 120/90-18 | 120/100-18 | 130/80-18 | 140/80-18	ULTRA HEAVY DUTY	4.0	TR6	12
19	70001351	3.00-19 | 3.25-19 | 3.50-19 | 3.75-19 | 4.00-19 | 4.50-19 | 70/100-19 | 80/90-19 | 80/100-19 | 90/90-19 100/90-19 | 110/80-19 | 110/90-19 | 120/80-19 | 120/90-19 | 130/70-19 | 130/80-19	HEAVY DUTY	2.0	TR6	20
19	70001350	5.00-19 | 120/70-19 | 120/90-19 | 130/60-19 | 140/80-19	HEAVY DUTY	2.0	TR6	20
19	70001354	2.00-19 | 2.25-19	STANDARD DUTY	1.5	TR4	20
19	70001353	2.50-19 | 2.75-19 | 80/100-19 | 90/90-19	STANDARD DUTY	1.5	TR6	20
19	70001352	100/90-19 | 110/90-19 | 120/70-19 | 120/80-19 | 130/70-19	ULTRA HEAVY DUTY	4.0	TR6	10
21	70001356	2.50-21 | 2.75-21 | 3.00-21 | 3.25-21 | 3.60-21 | 80/90-21 | 80/100-21 | 90/80-21 | 90/90-21 | 90/100-21 100/80-21	HEAVY DUTY	2.0	TR6	20
21	70001361	2.50-21 | 2.75-21 | 3.00-21 | 3.25-21 | 3.60-21 | 80/90-21 | 80/100-21 | 90/80-21 | 90/90-21 | 90/100-21 100/80-21	STANDARD DUTY	1.5	TR6	20
21	70001355	2.50-21 | 2.75-21 | 3.00-21 | 3.25-21 | 3.60-21 | 80/90-21 | 80/100-21 | 90/80-21 | 90/90-21 | 90/100-21 100/80-21	ULTRA HEAVY DUTY	4.0	TR6	15



TR 4



TR 6



JS 87Cl 90/90



JS 87N 90/90



JS 87N 45/90



Inch	Code	Size	Homologation	Aspect	Version	Air pressure estimated
FRONT						
19	70001193	70/100-19	NHS	CYLINDRICAL	STANDARD	0.8/1.0
21	70000891	80/100-21	NHS	CYLINDRICAL	STANDARD	0.8/1.0
21	70000893	90/90-21	NHS	CYLINDRICAL	STANDARD	0.8/1.0
21	70000898	90/90-21	NHS	CYLINDRICAL	RALLY	1.1/1.3
21	70000892	90/100-21	NHS	CYLINDRICAL	STANDARD	0.8/1.0
REAR						
16	70001194	90/100-16	NHS	CYLINDRICAL	STANDARD	0.7/0.9
18	70000882	110/80-18	NHS	CYLINDRICAL	STANDARD	0.8/1.0
18	70000894	110/100-18	NHS	CYLINDRICAL	STANDARD	0.8/1.0
18	70000886	120/90-18	NHS	CYLINDRICAL	STANDARD	0.8/1.0
18	70000887	120/90-18	NHS	CYLINDRICAL	SOFT	0.5/0.6
18	70000884	120/100-18	NHS	CYLINDRICAL	STANDARD	0.8/1.0
18	70000889	140/80-18	NHS	CYLINDRICAL	STANDARD	0.8/1.1
18	70000890	140/80-18	NHS	CYLINDRICAL	SOFT	0.5/06
18	70000895	140/80-18	NHS	FLAT	EXTREME	0.5/06
18	70000897	140/80-18	NHS	CYLINDRICAL	RALLY	1.1/1.3
19	70000881	100/90-19	NHS	CYLINDRICAL	STANDARD	0.8/1.0
19	70000883	110/90-19	NHS	CYLINDRICAL	STANDARD	0.8/1.0
19	70000885	120/80-19	NHS	CYLINDRICAL	STANDARD	0.8/1.0
19	70000888	120/90-19	NHS	CYLINDRICAL	STANDARD	0.8/1.0

LONGLIFE MOUSSE 2026

FRONT						
21	70001700	80/100-21	NHS	CYLINDRICAL	STANDARD	0.8/0.9
21	70001701	90/90-21	NHS	CYLINDRICAL	STANDARD	0.8/0.9
FRONT						
18	70001703	120/90-18	NHS	CYLINDRICAL	STANDARD	0.8/0.9
18	70001704	140/80-18	NHS	CYLINDRICAL	STANDARD	0.8/0.9
19	70001702	110/90-19	NHS	CYLINDRICAL	STANDARD	0.8/0.9

MOUSSE GEL


	70000896	1KG GEL MOUSSE		GEL	MOUSSE GEL	





TIRE DESIGNATION


SPEED SYMBOL

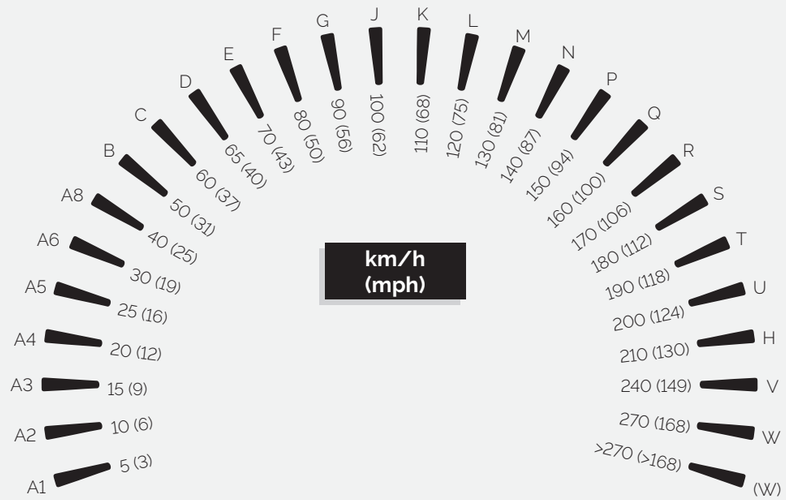

LOAD INDEX

U	kg	U	kg	U	kg	U	kg	U	kg	U	kg
0	45.0	20	80.0	40	140.0	60	250.0	80	450.0	100	800.0
1	46.2	21	82.5	41	145.0	61	257.0	81	462.0	101	825.0
2	47.5	22	85.0	42	150.0	62	265.0	82	475.0	102	850.0
3	48.7	23	87.5	43	155.0	63	272.0	83	487.0	103	875.0
4	50.0	24	90.0	44	160.0	64	280.0	84	500.0	104	900.0
5	51.5	25	92.5	45	165.0	65	290.0	85	515.0	105	925.0
6	53.0	26	95.0	46	170.0	66	300.0	86	530.0	106	950.0
7	54.5	27	97.5	47	175.0	67	307.0	87	545.0	107	975.0
8	56.0	28	100.0	48	180.0	68	315.0	88	560.0	108	1000.0
9	58.0	29	103.0	49	185.0	69	325.0	89	580.0	109	1030.0
10	60.0	30	106.0	50	190.0	70	335.0	90	600.0	110	1060.0
11	61.5	31	109.0	51	195.0	71	345.0	91	615.0	111	1090.0
12	63.0	32	112.0	52	200.0	72	355.0	92	630.0	112	1120.0
13	65.0	33	115.0	53	206.0	73	365.0	93	650.0	113	1150.0
14	67.0	34	118.0	54	212.0	74	375.0	94	670.0	114	1180.0
15	69.0	35	121.0	55	218.0	75	387.0	95	690.0	115	1215.0
16	71.0	36	125.0	56	224.0	76	400.0	96	710.0	116	1250.0
17	73.0	37	128.0	57	230.0	77	412.0	97	730.0	117	1285.0
18	75.0	38	132.0	58	236.0	78	425.0	98	750.0	118	1320.0
19	77.5	39	136.0	59	243.0	79	437.0	99	775.0	119	1360.0

TIRE DESIGNATION

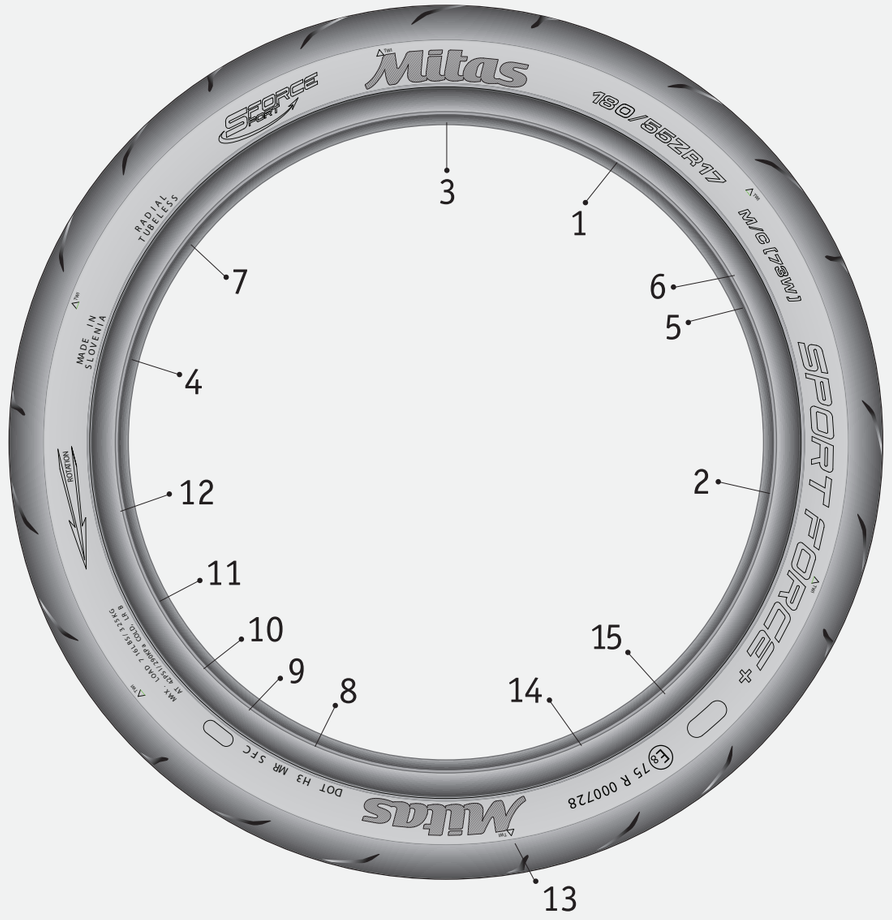

TIRE MARKINGS

1. Tire size:	2. Tread pattern designation:	3. Manufacturer:	4. Country of origin:	5. Speed symbol:	6. Load index:	7. Tubeless / Tubetype:	8. DOT marking:
180/55ZR17	SPORT FORCE+	Mitas	Slovenia	W (>270 km/h)	73 (365 kg)	Tubeless	DOT H3 MR SFC
9. Production date	**10. Max. load capacity:**	**10. Max. inflation pressure:**	**11. Load range:**	**12. Direction of rotation:**	**13. Tread wear indicator:**	**14. Homologation No.:**	**15. Other homologations**
	716 lbs	AT 42 PSI COLD	B	Rotation	TWI	E8 75 R 000728	

AMERICAN ALPHA INDICATION

Alpha	Inch	Alpha	Inch
H	3.15	R	4.50
J	3.50	S	4.75
L	3.65	T	5.10
M	3.75	U	5.60
N	4.10	V	5.90
P	4.10		

Metric	Inch	Alpha	Metric	Inch	Alpha
80/90	2.50/2.75	MH90	110/90	4.00/4.25	MP85
90/90	2.75/3.00	MJ90	120/90	4.50/4.75	MR90
100/90	3.25/3.50	MM90	130/80	5.00/5.10	
110/90	3.75/4.00	MN90	130/90	5.00/5.10	MT90
120/80	4.25/4.50		140/80	5.50/6.00	
120/90	4.25/4.50	MR90	140/90	5.50/6.00	MJ90
130/90	5.00/5.10	MT90	150/80	6.00/6.25	MV85
			150/90	6.00/6.25	MV85

Metric	Inch	Metric	Inch
60/100 90/80	2.50/2.75	80/100 80/90	2.50/3.60
70/100 90/80	2.75/3.00	90/100 110/90	3.60/4.10
80/100 100/80	3.00/3.25	100/100 120/80	4.00/4.10
		110/100 130/80	4.00/4.50
		120/100 140/80	5.00/5.10

COMPARATIVE CHART FOR METRIC-DECIMAL SIZE DESCRIPTION

Tire size	Load index		Permitted rim	Tire size			
				Alphanumeric	Inch		
	Standard	Reiforced			100	90	80
2.75-16	40	46	1.50-1.85	MH 90-16	80/100-16	80/90-16	90/80-16
3.00-16	40	48	1.60-2.15	MH 90-16	90/100-16	90/90-16	100/80-16
3.25-16	48	55	1.85-2.50	MJ 90 - 16	100/100-16	100/90-16	110/80-16
3.50-16	52	58	1.85-2.50	ML 90-16	100/100-16	100/90-16	110/80-16
4.60-16	58	59	1.85-3.00	MM 90-16	100/100-16	110/90-16	120/80-16
2.75-17	41	47	1.50-1.85	MH 90-17	80/100-17	80/90-17	90/80-17
3.00-17	41	50	1.60-2.15	MH 90-17	90/100-17	90/90-17	100/80-17
4.50-17	50	67	2.15-3.00	MR 90-17	110/100-17	130/90-17	140/80-17
4.60-17	50	62	1.85-3.00	MS 90-17	100/100-17	110/90-17	120/80-17
5.10-17	50	67	2.50-3.50	MT 90-17	110/100-17	130/90-17	140/80-17
2.75-18	42	48	1.50-1.85	MH 90-18	80/100-18	80/90-18	90/80-18
3.00-18	47	52	1.60-2.15	MH 90-18	90/100-18	90/90-18	100/80-18
3.25-18	52	59	1.85-2.50	MJ 90 -18	100/100-18	100/90-18	110/80-18
3.50-18	56	62	1.85-2.50	ML 90-18	100/100-18	100/90-18	110/80-18
3.60-18	51	62	1.85-2.50	MH 90-18	100/100-18	90/90-18	100/80-18
4.00-18	64	69	2.15-3.00	MN 90-18	110/100-18	120/90-18	130/80-18
4.10-18	60	69	1.85-3.00	ML 90-18	100/100-18	100/90-18	110/80-18
4.25/85-18	64	69	1.85-3.00	MM 90-18	110/100-18	110/90-18	120/80-18
4.25-18	66	69	2.15-3.00	ML 90-18	110/100-18	120/90-18	130/80-18
4.60-18	63	69	1.85-3.00	MR 90-18	110/100-18	120/90-18	130/80-18
3.00-19	49	54	1.60-2.15	MH 90-19	90/100-19	90/90-19	100/80-19
3.25-19	54	54	1.85-2.50	MJ 90-19	100/100-19	100/90-19	110/80-19
3.50-19	54	57	1.85-2.50	ML 90-19	100/100-19	100/90-19	110/80-19
3.60-19	52	54	1.85-2.50	MH 90-19	100/100-19	90/90-19	100/80-19
2.75-21	45	54	1.50-1.85	MH 90-21	80/100-21	80/90-21	90/80-21
3.00-21	51	57	1.60-2.15	MH 90-21	90/100-21	90/90-21	100/80-21

DISCONTINUED TIRES
(Available until the stock runs out)





B-14 E-02 E-03 E-05 E-06 E-07 E-07+

DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
B-14										
70000727	4.00-10C	69J	TT							–
E-02 TOURIST										
70000476	3.00-21	54S	TT		70001371	3.00-21	54S	TT		**E-05**
E-03 TOURIST										
70000477	3.50-18	62R	TT		70001083	3.50-18	62S	TT		**E-05**
E-05										
70000478	3.00-21	54S	TT		70001371	3.00-21	54S	TT		**E-05**
70000479	4.00-19	71P	TT		70001084	4.00-19	71S	TT		**E-05**
E-06										
70000480	2.75-16	46P	TT		70001018	2.75-16	46S	TT		**E-06**
E-07 ENDURO										
70000453	120/90-17	64S	TL*		70001003	120/90B17	64H	TL/TT		**ENDURO TRAIL**
70000454	130/80-17	65T	TL*		70001004	130/80B17	65H	TL/TT		**ENDURO TRAIL**
70000457	140/80-17	69T	TL*		70001006	140/80B17	69H	TL/TT		**ENDURO TRAIL**
70000456	140/80-17	69T	TL*	DAKAR	70001006	140/80B17	69H	TL/TT		**ENDURO TRAIL**
70000462	150/70-17	69T	TL*		70001011	150/70B17	69H	TL/TT		**ENDURO TRAIL**
70000461	150/70-17	69T	TL*	DAKAR	70001010	150/70B17	69H	TL/TT	DAKAR	**ENDURO TRAIL**
70000455	130/80-18	72T	TL*		70001005	130/80B18	72H	TL/TT		**ENDURO TRAIL**
70000459	140/80-18	70T	TL*		70001008	140/80B18	70H	TL/TT		**ENDURO TRAIL**
70000458	140/80-18	70T	TL*	DAKAR	70001007	140/80B18	70H	TL/TT	DAKAR	**ENDURO TRAIL**
70000464	150/70-18	70T	TL*		70001013	150/70B18	70H	TL/TT		**ENDURO TRAIL**
70000463	150/70-18	70T	TL*	DAKAR	70001012	150/70B18	70H	TL/TT	DAKAR	**ENDURO TRAIL**
E-07 ENDURO										
70000450	100/90-19	57T	TL*		70001499	100/90-19	57H	TL/TT		**ENDURO TRAIL+**
70000449	100/90-19	57T	TL*	DAKAR	70001499	100/90-19	57H	TL/TT		**ENDURO TRAIL+**
70000452	110/80-19	59T	TL*		70001002	110/80-19	59H	TL/TT		**ENDURO TRAIL**
70000451	110/80-19	59T	TL*	DAKAR	70001001	110/80B19	59H	TL/TT	DAKAR	**ENDURO TRAIL**
70000466	90/90-21	54T	TL*		70001015	90/90-21 (3.00-21)	54H	TL/TT		**ENDURO TRAIL**
70000465	90/90-21	54T	TL*	DAKAR	70001014	90/90B21 (3.00B21)	54H	TL/TT	DAKAR	**ENDURO TRAIL**
E-07+ ENDURO TRAIL										
70000548	130/80B17	65T	TL*		70001037	130/80B17	65H	TL/TT		**ENDURO TRAIL+**
70000550	140/80B17	69T	TL*		70001038	140/80B17	69H	TL/TT		**ENDURO TRAIL+**
70000549	140/80B17	69T	TL*	DAKAR	70001038	140/80B17	69H	TL/TT		**ENDURO TRAIL+**
70000554	150/70B17	69T	TL*		70001042	150/70B17	69H	TL/TT		**ENDURO TRAIL+**
70000553	150/70B17	69T	TL*	DAKAR	70001041	150/70B17	69H	TL/TT	DAKAR	**ENDURO TRAIL+**
70000559	170/60B17	72T	TL*		70001044	170/60B17	72H	TL/TT		**ENDURO TRAIL+**
70000558	170/60B17	72T	TL*	DAKAR	70001043	170/60B17	72H	TL/TT	DAKAR	**ENDURO TRAIL+**
70000547	120/80B18	62T	TL*		70001036	120/80B18	62H	TL/TT		**ENDURO TRAIL+**
70000552	140/80B18	70T	TL*		70001040	140/80B18	70H	TL/TT		**ENDURO TRAIL+**
70000551	140/80B18	70T	TL*	DAKAR	70001039	140/80B18	70H	TL/TT	DAKAR	**ENDURO TRAIL+**
70000557	150/70B18	70T	TL*		70001185	150/70B18	70H	TL/TT		**ENDURO TRAIL+**
70000555	150/70B18	70T	TL*	DAKAR	70001188	150/70B18	70H	TL/TT	DAKAR	**ENDURO TRAIL+**



E-07+ E-08 E-09

DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
E-07+ ENDURO TRAIL										
70000544	110/80B19	59T	TL*		70001033	110/80B19	59H	TL/TT		**ENDURO TRAIL+**
70000543	110/80B19	59T	TL*	DAKAR	70001032	110/80B19	59H	TL/TT	DAKAR	**ENDURO TRAIL+**
70000546	120/70B19	60T	TL*		70001035	120/70B19	60H	TL/TT		**ENDURO TRAIL+**
70000545	120/70B19	60T	TL*	DAKAR	70001034	120/70B19	60H	TL/TT	DAKAR	**ENDURO TRAIL+**
70000561	90/90B21	54T	TL*		70001500	90/90-21 (3.00-21)	54H	TL/TT		**ENDURO TRAIL+**
70000560	90/90B21	54T	TL*	DAKAR	70001187	90/90B21 (3.00B21)	54H	TL/TT	DAKAR	**ENDURO TRAIL+**
E-08 ENDURO										
70000566	120/90-17	64T	TL*		70000521	120/90-17	64H	TL		**TERRA FORCE-R**
70000567	130/80-17	65T	TL*		70000522	130/80-17	65H	TL		**TERRA FORCE-R**
70000569	140/80-17	69H	TL*		70000525	140/80r17	69V	TL		**TERRA FORCE-R**
70000570	150/70-17	69H	TL*		70000526	150/70R17	69V	TL		**TERRA FORCE-R**
70000572	4.10-18	60P	TT		70001019	110/80-18	58T	TL/TT		**ENDURO TRAIL XT+***
70000568	130/80-18	72T	TL*		70001005	130/80B18	72H	TL/TT		**ENDURO TRAIL***
70000564	100/90-19	57H	TL*		70000520	100/90-19	57H	TL		**TERRA FORCE-R**
70000565	110/80-19	59H	TL*		70000523	110/80R19	59V	TL		**TERRA FORCE-R**
70000571	2.75-21	45P	TT		70001150	80/90-21	48H	TL/TT		**ENDURO TRAIL XT+***
70000573	90/90-21	54T	TL*		70000529	90/90-21 (3.00-21)	54H	TL/TT		**TERRA FORCE-R**
E-09 ENDURO										
70000487	120/90-17	64R	TL*		70001021	120/90B17	64T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000486	120/90-17	64R	TL*	DAKAR	70001021	120/90B17	64T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000489	130/80-17	65R	TL*		70001022	130/80B17	65T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000488	130/80-17	65R	TL*	DAKAR	70001022	130/80B17	65T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000493	140/80-17	69R	TL*		70001024	140/80B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000492	140/80-17	69R	TL*	DAKAR	70001024	140/80B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000497	150/70-17	69R	TL*		70001027	150/70B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000496	150/70-17	69R	TL*	DAKAR	70001027	150/70B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000502	4.10-18	60P	TT		70001019	110/80-18	58T	TL/TT		**ENDURO TRAIL XT+**
70000483	110/80-18	58P	TT		70001019	110/80-18	58T	TL/TT		**ENDURO TRAIL XT+**
70000491	130/80-18	72R	TL*		70001023	130/80B18	72T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000490	130/80-18	72R	TL*	DAKAR	70001023	130/80B18	72T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000495	140/80-18	70R	TL*		70001026	140/80B18	70T	TL/TT		**ENDURO TRAIL XT+**
70000494	140/80-18	70R	TL*	DAKAR	70001025	140/80B18	70T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000500	150/70-18	70R	TL*		70001029	150/70B18	70T	TL/TT		**ENDURO TRAIL XT+**
70000498	150/70-18	70R	TL*	DAKAR	70001028	150/70B18	70T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000482	100/90-19	57R	TL*		70001141	100/90-19	57T	TL/TT		**ENDURO TRAIL XT+**
70000481	100/90-19	57R	TL*	DAKAR	70001141	100/90-19	57T	TL/TT		**ENDURO TRAIL XT+**
70000485	110/80-19	59R	TL*		70001020	110/80B19	59T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000484	110/80-19	59R	TL*	DAKAR	70001020	110/80B19	59T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70000501	2.75-21	45P	TT		70001150	80/90-21	48H	TL/TT		**ENDURO TRAIL XT+***
70000503	80/90-21	48P	TT		70001150	80/90-21	48H	TL/TT		**ENDURO TRAIL XT+***
70000505	90/90-21	54R	TL*		70001031	90/90-21 (3.00-21)	54T	TL/TT		**ENDURO TRAIL XT+***
70000504	90/90-21	54R	TL*	DAKAR	70001030	90/90B21 (3.00B21)	54T	TL/TT	DAKAR	**ENDURO TRAIL XT+***




E-12 | E-13 | ENDURO TRAIL | ENDURO TRAIL+ | ENDURO TRAIL-ADV | ENDURO TRAIL-XT | ENDURO TRAIL-XT+

DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
E-12 RALLY STAR										
70000334	140/80-18	70R	TT		70000993	140/80-18	70R	TT	SUPER LIGHT	**ENDURO TRAIL-RALLY PRO**
70000335	140/80-18	70R	TT		70000993	140/80-18	70R	TT	SUPER LIGHT	**ENDURO TRAIL-RALLY PRO**
E-13 RALLY STAR										
70000336	90/90-21 (3.00-21)	54R	TT		70000994	90/90-21	54R	TT	SUPER LIGHT	**ENDURO TRAIL-RALLY PRO**
70000337	90/90-21 (3.00-21)	54R	TT		70000994	90/90-21	54R	TT	SUPER LIGHT	**ENDURO TRAIL-RALLY PRO**
ENDURO HYBRID										
70001060	120/100-18	68P	TL/TT	SUPER						–
70001061	120/100-18 (4.00-18)	68P	TL/TT	SUPER LIGHT						–
70001062	110/90-19	62P	TL/TT	SUPER						–
70001063	110/90-19	62P	TL/TT	SUPER LIGHT						–
70001189	80/100-21 (2.75-21)	51P	TL/TT	SUPER						–
ENDURO TRAIL										
70001009	140/80B18 (5.10-18)	70H	TT		70001008	140/80B18 (5.10-18)	70H	TL/TT		**ENDURO TRAIL**
70001016	90/90-21 (3.00-21)	54H	TT		70001015	90/90-21 (3.00-21)	54H	TL/TT		**ENDURO TRAIL**
ENDURO TRAIL+										
70001017	100/90B19	57H	TL/TT		70001499	100/90-19	57H	TL/TT		**ENDURO TRAIL+**
70001214	4.00B18	70H	TL/TT							–
70001292	140/80B18	70T	TL/TT		70001040	140/80B18	70H	TL/TT		**ENDURO TRAIL+**
70001291	90/90-21 (3.00-21)	54T	TL/TT		70001500	90/90-21 (3.00-21)	54H	TL/TT		**ENDURO TRAIL+**
70001186	90/90B21 (3.00B21)	54H	TL/TT		70001500	90/90-21 (3.00-21)	54H	TL/TT		**ENDURO TRAIL+**
ENDURO TRAIL-ADV										
70001201	110/80R19	59V	TL/TT		70001414	110/80R19	59V	TL/TT		**ENDURO TRAIL-ADV 2**
70001096	120/70ZR19	60W	TL/TT		70001413	120/70ZR19	60W	TL/TT		**ENDURO TRAIL-ADV 2**
70001202	90/90-21 (3.00-21)	54V	TL/TT		70001415	90/90-21 (3.00-21)	54V	TL/TT		**ENDURO TRAIL-ADV 2**
70001199	150/70R17	69V	TL/TT		70001412	150/70R17	69V	TL/TT		**ENDURO TRAIL-ADV 2**
70001095	170/60ZR17	72W	TL/TT		70001410	170/60ZR17	72W	TL/TT		**ENDURO TRAIL-ADV 2**
70001200	150/70R18	70V	TL/TT		70001411	150/70R18	70V	TL/TT		**ENDURO TRAIL-ADV 2**
ENDURO TRAIL-XT										
70001210	140/80B17	69T	TL/TT							–
70001209	140/80B17	69T	TL/TT	DAKAR	70001024	140/80B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70001212	150/70B17	69T	TL/TT							–
70001211	150/70B17	69T	TL/TT	DAKAR	70001027	150/70B17	69T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70001086	170/60B17	72T	TL/TT		70001181	170/60B17	72T	TL/TT		**ENDURO TRAIL XT+**
70001213	170/60B17	72T	TL/TT	DAKAR	70001180	170/60B17	72T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70001215	140/80B18	70T	TL/TT		70001026	140/80B18	70T	TL/TT		**ENDURO TRAIL XT+**
70001216	140/80B18	70T	TL/TT	DAKAR	70001025	140/80B18	70T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
70001218	150/70B18	70T	TL/TT		70001029	150/70B18	70T	TL/TT		**ENDURO TRAIL XT+**
70001432	150/70R18	70T	TL/TT		70001431	150/70R18	70T	TL/TT		**ENDURO TRAIL XT+**
70001217	150/70B18	70T	TL/TT	DAKAR	70001028	150/70B18	70T	TL/TT	DAKAR	**ENDURO TRAIL XT+**
ENDURO TRAIL-XT+										
70001182	80/90B21	48T	TL/TT	DAKAR						–



FT-18 | H-01 | H-02 | H-03 | H-04 | H-05 | H-06 | H-18 | M-02

DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
FT-18 FLAT TRACK										
70000355	27×7-19	NHS	TT		70001079	130/80-19 (27×7-19)	NHS	TT	SOFT	**FLAT TRACK**
70000354	27.5×7.5-19	NHS	TT		70001081	140/80-19 (27.5×7.5-19)	NHS	TT	SOFT	**FLAT TRACK**
H-01										
70000007	2.75-19 (80/100-19)	43P	TT		70000912	2.75-19	43P	TT		**H-06**
70000008	3.00-19	49P	TT		70000913	3.00-19	49P	TT		**H-06**
70000009	3.25-19	54P	TT		70000916	3.25-19	54P	TT		**H-06**
H-02										
70001442	2.00-19 (2-19)	24B	TT		70001862	2.00-19 (2-19)	31S	TT		**H-02**
70001443	2.25-19 (2 1/4-19)	30B	TT		70001863	2.25-19 (2 1/4-19)	37S	TT		**H-02**
70000010	2.50-19	41L	TT		70000899	2.50-19	41P	TT		**H-02**
70000011	3.00-19	57P	TT		70000900	3.00-19	57P	TT		**H-02**
70000012	3.50-19	63P	TT		70000901	3.50-19	63P	TT		**H-02**
70000013	4.00-19	71P	TT		70000903	4.00-19	71P	TT		**H-02**
70000014	4.00-19	71P	TT	SIDE CAR	70000902	4.00-19	71P	TT	SIDE CAR	**H-02**
H-03										
70000015	2.75-18	48P	TT		70000904	2.75-18	48P	TT		**H-03**
70000018	3.50-18	62P	TT		70000907	3.50-18	62P	TT		**H-03**
70000016	3.00-18	52P	TT		70000905	3.00-18	52P	TT		**H-03**
70000017	3.25-18 (90/100-18)	59P	TT		70000906	3.25-18 (90/100-18)	59P	TT		**H-03**
H-04										
70000019	2.50-16	41L	TT		70000908	2.50-16 (70/100-16)	41P	TT		**H-04**
70000020	3.25-18	59P	TT		70000909	3.25-18	59P	TT		**H-04**
H-05										
70000021	3.25-16	55P	TT		70000914	3.25-16	55P	TT		**H-06**
H-06										
70000025	3.50-16	64S	TT		70000917	3.50-16	58P	TT		**H-06**
70000022	2.75-16	46P	TT		70000910	2.75-16 (2 3/4-16)	46P	TT		**H-06**
223123	2.75-18	48P	TT		70000911	2.75-18	48P	TT	REINFORCED	**H-06**
70000024	3.25-18 (90/100-18)	59P	TT		70000915	3.25-18 (90/100-18)	59P	TT		**H-06**
70000026	3.50-18	62P	TT		70000918	3.50-18	62P	TT		**H-06**
70000027	4.00-18	64S	TT		70000919	4.00-18	64S	TT		**H-06**
H-18 FLAT TRACK										
70000356	130/80-19 (27×7-19)	NHS	TT		70001079	130/80-19 (27×7-19)	NHS	TT	SOFT	**FLAT TRACK**
70000357	130/80-19 (27×7-19)	NHS	TT		70001080	130/80-19 (27×7-19)	NHS	TT	SUPER SOFT	**FLAT TRACK**
70000359	140/80-19 (27.5×7.5-19)	NHS	TT		70001081	140/80-19 (27.5×7.5-19)	NHS	TT	SOFT	**FLAT TRACK**
70000360	140/80-19 (27.5×7.5-19)	NHS	TT		70001082	140/80-19 (27.5×7.5-19)	NHS	TT	SUPER SOFT	**FLAT TRACK**
H-18 HIGHWAY										
70000083	130/80-19 (27×7-19)	71H	TL*		70001058	130/80-19 (27×7-19)	71H	TL/TT	STREET	**FLAT TRACK**
70000084	140/80-19 (27.5×7.5-19)	71H	TL*		70001059	140/80-19 (27.5×7.5-19)	71H	TL/TT	STREET	**FLAT TRACK**
M-02										
70000798	2-19 (2.00-19)	24B	TT		70001442	2.00-19 (2-19)	24B	TT		**H-02**
70000797	2 1/4-19 (2.25-19)	30B	TT		70001443	2.25-19 (2 1/4-19)	30B	TT		**H-02**



DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
MC-2										
70000785	3 1/4-16 (3.25-16)	54J	TL/TT							–
MC-7										
70000063	3.00-18	52R	TL*		70001255	3.00-18	52S	TL*	REINFORCED	**MC-7**
70000064	3.25-18	52P	TL/TT		70000915	3.25-18 (90/100-18)	59P	TT		**H-06**
70000065	3.50-18	56P	TL/TT		70000918	3.50-18	62P	TT		**H-06**
MC-11										
70000775	2 1/4-17 (2.25-17)	39J	TT		70001118	2.25-17 (2 1/4-17)	39P	TL/TT	REINFORCED	**STREET FORCE**
70000772	2 1/2-17 (2.50-17)	43J	TL/TT		70001120	2.50-17	43P	TL/TT	REINFORCED	**STREET FORCE**
70000776	2 3/4-17 (2.75-17)	47J	TL/TT		70001124	2.75-17 (2 3/4-17)	47P	TL/TT	REINFORCED	**STREET FORCE**
MC-20 MONSUM										
70000701	3.50-10	51P	TL*		70000676	3.50-10	51P	TL*		**TOURING FORCE-SC**
70000691	120/70-10	54L	TL*		70000639	120/70-10	54L	TL*		**TOURING FORCE-SC**
70000697	120/90-10	57L	TL*		70000654	120/90-10	66L	TL*		**TOURING FORCE-SC**
70000703	90/90-12	54J	TL*		70001705	90/90-12	54P	TL*		**MC-20 MONSUM**
70000695	120/70-12	58P	TL*		70001223	120/70-12	58S	TL/TT		**TOURING FORCE-SC 2**
70000698	130/70-12	62P	TL*		70001244	130/70-12	64S	TL/TT	REINFORCED	**TOURING FORCE-SC 2**
MC-22 ELEGANCE										
70000735	120/70-10	54L	TL*		70000639	120/70-10	54L	TL*		**TOURING FORCE-SC**
70000736	120/70-10	54L	TL*	WHITE WALL	70000692	120/70-10	51P	TL*	WHITE WALL	**MC-20 MONSUM**
MC-25 BOGART										
70000046	80/90-17	44R	TL*							–
70000043	100/80-17	52S	TL*		70001252	100/80-17	52S	TL/TT		**STREET FORCE**
70000042	100/80-17	52R	TL*		70001230	100/80-17	52H	TL/TT		**STREET FORCE**
70000045	130/70-17	62S	TL*		70001232	130/70-17	62H	TL/TT		**STREET FORCE**
70000044	130/70-17	62R	TL*		70001253	130/70-17	62S	TL/TT		**STREET FORCE**
MC-32										
70000093	100/80-17	52R	TL*	SIPES						–
70000095	130/70-17	62R	TL*	SIPES						–
MC-32 WIN SCOOT										
70000706	100/80-10	53P	TL*							–
70000709	120/70-10	54P	TL/TT							–
70000712	120/90-10	57L	TL*							–
70000711	120/80-16	60P	TL*							–
MC-34										
70000737	100/90-10	56P	TL*							–
MC-50										
70000058	80/100-17	46S	TL*							–
70000047	100/80-17	52H	TL*		70001229	100/80-17	52H	TL/TT		**SPORT FORCE+**



DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
MC-50										
70000048	100/90-17	55S	TL*							–
70000051	110/70-17	54H	TL*		70001231	110/70-17	54H	TL/TT		**SPORT FORCE+**
70000054	130/70-17	62H	TL*		70001233	130/70-17	62H	TL/TT		**SPORT FORCE+**
70000056	140/70-17	66H	TL*		70001234	140/70-17	66H	TL/TT		**SPORT FORCE+**
70000052	110/80-17	57H	TL*		70001679	110/80-17	57H	TL/TT		**SPORT FORCE+**
70000055	130/80-17	65H	TL*		70001490	130/80-17	65H	TL/TT		**STREET FORCE**
70000057	140/80-17	69H	TL*							–
70000049	100/90-18	56H	TL*		70001571	100/90-18	56H	TL/TT		**STREET FORCE**
70000050	100/90-19	57H	TL*		70000030	100/90-19	57H	TL*		**CUSTOM FORCE**
70000053	120/90-18	65H	TL*							–
S-03										
70000732	4.00-8	63J	TT							–
S-04										
70000733	4.00-8C	66L	TT							–
SPORT FORCE+										
70001409	110/70-17	54S	TL/TT							–
70001407	140/70-17	66S	TL/TT							–
70001408	150/60-17	66S	TL/TT							–
STREET FORCE										
70001230	100/80-17	52H	TL/TT		70001252	100/80-17	52S	TL/TT		**STREET FORCE**
70001398	100/90-18	56V	TL/TT		70001571	100/90-18	56H	TL/TT		**STREET FORCE**
70001232	130/70-17	62H	TL/TT		70001253	130/70-17	62S	TL/TT		**STREET FORCE**
70001489	100/70-17	49S	TL/TT							–
TERRA FORCE-EF										
70001557	140/80-18	70R	TT	PRAKTIKA						–
70001555	90/90-21 (3.00-21)	54M	TT	PRAKTIKA						–
70001556	90/100-21	57R	TT	PRAKTIKA						–
TERRA FORCE-MX SM										
70001559	100/90-19	57M	TT	PRAKTIKA						–
70001560	110/90-19	62M	TT	PRAKTIKA						–
70001558	80/100-21	51M	TT	PRAKTIKA						–
TERRA FORCE-MX MH										
70001562	100/90-19	57M	TT	PRAKTIKA						–
70001563	110/90-19	62M	TT	PRAKTIKA						–
70001561	80/100-21	51M	TT	PRAKTIKA						–
TERRA FORCE-R										
70000520	100/90-19	57H	TL*		70001293	100/90-19	57H	TL/TT		**ENDURO TRAIL-SP**
70000522	130/80-17	65H	TL*		70001294	130/80B17	65H	TL/TT		**ENDURO TRAIL-SP**



TOURING FORCE-SC

DISCONTINUED TIRES					REPLACEMENT TIRES					
Code	Tire size	LI/SS	Type (TL/TT)	Version	Code	Tire size	LI/SS	Type (TL/TT)	Version	Tread pattern
TOURING FORCE-SC										
70000628	100/90-10	61J	TL*	REINFORCED	70001195	100/90-10	61M	TL*	REINFORCED	**TOURING FORCE-SC**
70000660	130/70-13	63P	TL*	REINFORCED	70001664	130/70-13	63S	TL/TT	REINFORCED	**TOURING FORCE-SC**
70000625	100/70-14	53L	TL*	REINFORCED	70001586	100/70-14	53P	TL*	REINFORCED	**TOURING FORCE-SC**
70000636	110/80-14	59P	TL*		70001433	110/80-14	59S	TL*	REINFORCED	**TOURING FORCE-SC**
70000645	120/70-14	55L	TL*							–
70000646	120/70-14	55P	TL*							–
70000648	120/70-15	56P	TL*							–
70000662	130/80-15	63P	TL*		70001434	130/80-15	63S	TL*		**TOURING FORCE-SC**
70000681	90/80-16	51P	TL*		70001435	90/80-16	51S	TL*	REINFORCED	**TOURING FORCE-SC**
70000661	130/70-16	61P	TL*		70001197	130/70-16	61S	TL		**TOURING FORCE-SC**

Mitas Motorcycle Tires

Škofjeloška cesta 6,
4000 Kranj, Slovenia
Phone: +386 4 206 58 83

info-moto@mitas-tires.com



Printing errors and mistakes reserved. 2026 | 5

KEEP ON RIDING

mitas-moto.com @mitasmoto

Mitas